

Технические характеристики на преобразователи напряжения DC/DC серии CCG30

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Брянск (4832)59-03-52
Вологда (8172)26-41-59
Иваново (4932)77-34-06
Калининград (4012)72-03-81
Киров (8332)68-02-04
Курск (4712)77-13-04
Москва (495)268-04-70
Нижний Новгород (831)429-08-12
Орел (4862)44-53-42
Пермь (342)205-81-47
Самара (846)206-03-16
Смоленск (4812)29-41-54
Тверь (4822)63-31-35
Тюмень (3452)66-21-18
Челябинск (351)202-03-61

Астана +7(7172)727-132
Владивосток (423)249-28-31
Воронеж (473)204-51-73
Ижевск (3412)26-03-58
Калуга (4842)92-23-67
Краснодар (861)203-40-90
Липецк (4742)52-20-81
Мурманск (8152)59-64-93
Новокузнецк (3843)20-46-81
Оренбург (3532)37-68-04
Ростов-на-Дону (863)308-18-15
Санкт-Петербург (812)309-46-40
Сочи (862)225-72-31
Томск (3822)98-41-53
Ульяновск (8422)24-23-59
Череповец (8202)49-02-64

Белгород (4722)40-23-64
Волгоград (844)278-03-48
Екатеринбург (343)384-55-89
Казань (843)206-01-48
Кемерово (3842)65-04-62
Красноярск (391)204-63-61
Магнитогорск (3519)55-03-13
Набережные Челны (8552)20-53-41
Новосибирск (383)227-86-73
Пенза (8412)22-31-16
Рязань (4912)46-61-64
Саратов (845)249-38-78
Ставрополь (8652)20-65-13
Тула (4872)74-02-29
Уфа (347)229-48-12
Ярославль (4852)69-52-93

Эл. почта: adm@nt-rt.ru || Сайт: <http://lambda.nt-rt.ru/>



30W DC-DC Converters




Features	Benefits
• Industry Standard 1" x 1" Footprint	• Fits in place of 2 x 1" converters
• Wide Range DC Input 9 - 36 or 18 - 76V	• Less Parts to Inventory
• High Efficiency - Up to 91%	• Easier System Thermal Management
• Six Sided Shielding	• Reduced Radiated Noise

Specification						
Model		CCG30				
Nominal Output Voltage	VDC	3.3	5V	12V	15V	
Input Voltage Range	VDC	9 - 36V or 18 - 76VDC				
Input Current	A	0.55 - 1.4A (model dependant)				
Output Voltage Adjustment	VDC	2.97 - 3.63	4.5 - 5.5	10.8 - 13.2	13.5 - 16.5	
Output Voltage Accuracy	%	±2%				
Ripple & Noise (max) pk-pk	mV	70	70	95	95	
Line Regulation (max)	mV	13.2	20	48	60	
Load Regulation (max)	mV	13.2	20	48	60	
Overcurrent Protection	%	>105% (Hiccup current style)				
Overvoltage Protection	%	No				
Remote On/Off	-	Yes; Low = ON, Open = OFF				
Operating Temperature	°C	-40°C to +110°C Case, -40°C to +85°C Ambient. See inst. manual for operation above 60°C				
Storage Temperature	°C	-55°C to +125°C				
Temperature Coefficient	%/°C	0.02%/°C				
Humidity (non condensing)	%RH	5 - 95% RH Operating and Non Operating				
Cooling	-	Convection or forced air				
Withstand Voltage	VDC	Input to Case: 1kVDC; Input to Output 1.5kVDC; Output to Case: 1kVDC				
Isolation Resistance	Ω	<100MΩ at 25°C and 70%RH, Output to Case 500VDC				
Vibration	-	Non Operating, 10-55Hz (sweep for 3 min.) Amplitude 1.52mm constant (Max 98m/s ²) X,Y,Z 1 hour each				
Shock	-	490.3m/s ²				
Safety Agency Certifications	-	UL60950-1, CSA60950-1, EN60950-1, CE Mark				
Weight (Typ)	g	20				
Size (WxHxD)	mm	25.4 x 9.9 x 25.4				
Warranty	yrs	5				

Note: See Installation Manual for full details, test methods of parameters and application notes

Model Selector Single Output						
Model	Output Voltage (V)	Output Current (A)	Input Voltage (V)	Maximum Power (W)	Input Current at Nominal Input (A)	Efficiency (%) (100% load, nominal input)
CCG30-24-03S	3.3	7	9 - 36	23.1	1.12	86
CCG30-24-05S	5	6	9 - 36	30.0	1.4	89
CCG30-24-12S	12	2.5	9 - 36	30.0	1.4	89
CCG30-24-15S	15	2	9 - 36	30.0	1.4	89
CCG30-48-03S	3.3	7	18 - 76	23.1	0.55	87
CCG30-48-05S	5	6	18 - 76	30.0	0.69	90
CCG30-48-12S	12	2.5	18 - 76	30.0	0.69	90
CCG30-48-15S	15	2	18 - 76	30.0	0.69	91

Outline Drawing CCG30

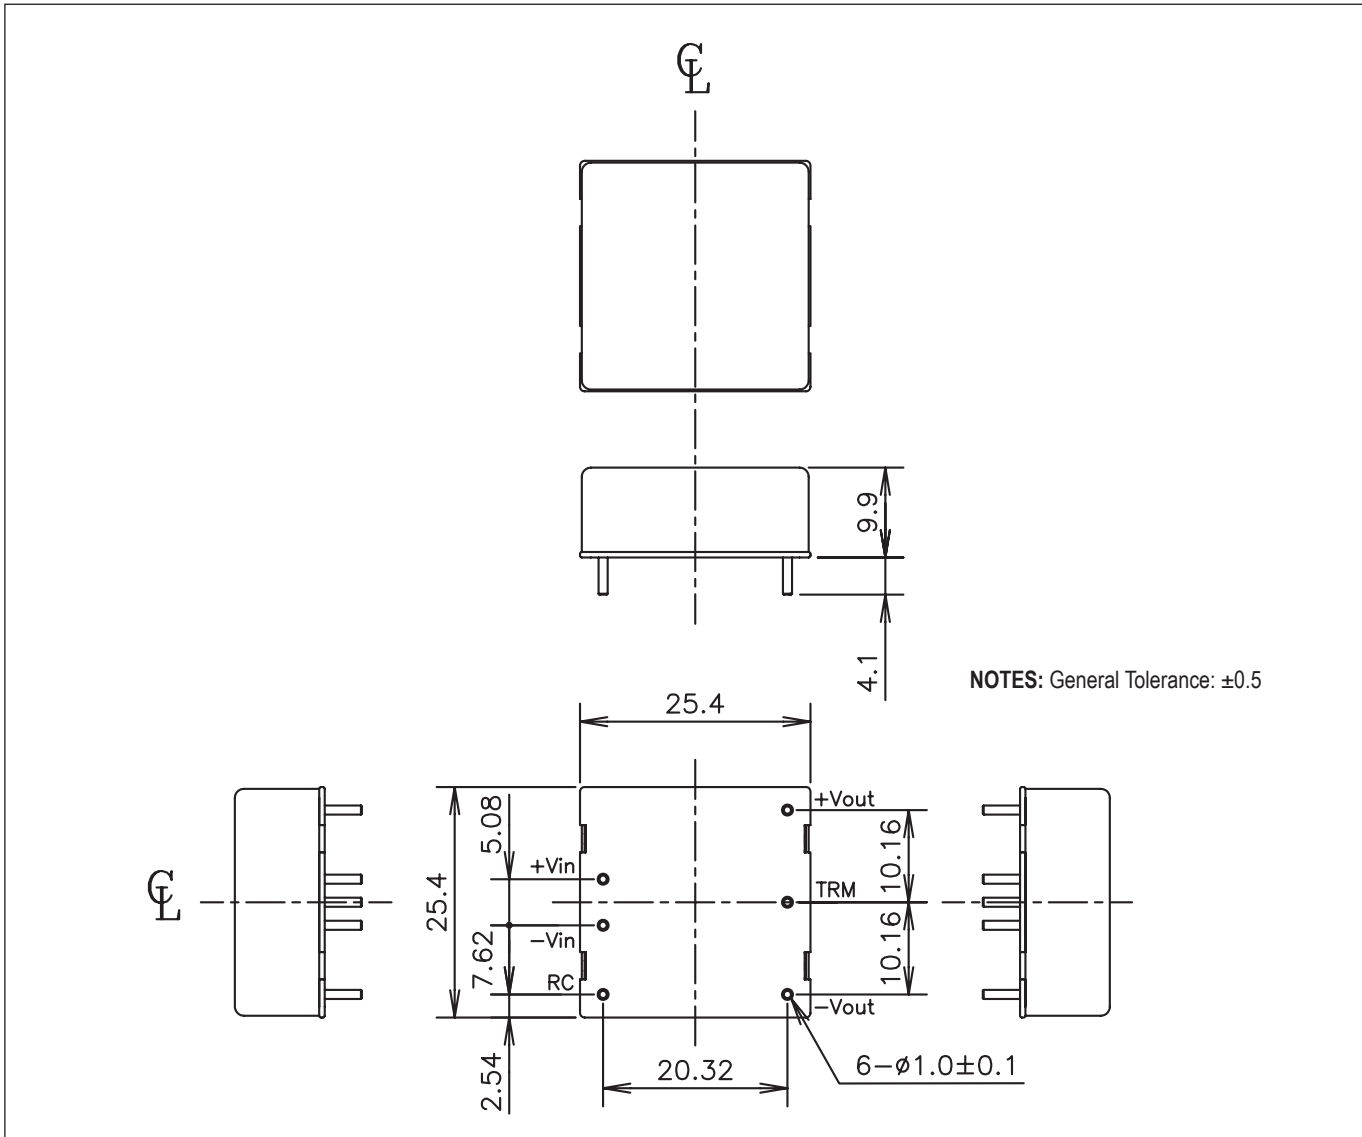

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72	Астана +7(7172)727-132	Белгород (4722)40-23-64
Брянск (4832)59-03-52	Владивосток (423)249-28-31	Волгоград (844)278-03-48
Вологда (8172)26-41-59	Воронеж (473)204-51-73	Екатеринбург (343)384-55-89
Иваново (4932)77-34-06	Ижевск (3412)26-03-58	Казань (843)206-01-48
Калининград (4012)72-03-81	Калуга (4842)92-23-67	Кемерово (3842)65-04-62
Киров (8332)68-02-04	Краснодар (861)203-40-90	Красноярск (391)204-63-61
Курск (4712)77-13-04	Липецк (4742)52-20-81	Магнитогорск (3519)55-03-13
Москва (495)268-04-70	Мурманск (8152)59-64-93	Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12	Новокузнецк (3843)20-46-81	Новосибирск (383)227-86-73
Орел (4862)44-53-42	Оренбург (3532)37-68-04	Пенза (8412)22-31-16
Пермь (342)205-81-47	Ростов-на-Дону (863)308-18-15	Рязань (4912)46-61-64
Самара (846)206-03-16	Санкт-Петербург (812)309-46-40	Саратов (845)249-38-78
Смоленск (4812)29-41-54	Сочи (862)225-72-31	Ставрополь (8652)20-65-13
Тверь (4822)63-31-35	Томск (3822)98-41-53	Тула (4872)74-02-29
Тюмень (3452)66-21-18	Ульяновск (8422)24-23-59	Уфа (347)229-48-12
Челябинск (351)202-03-61	Череповец (8202)49-02-64	Ярославль (4852)69-52-93

Эл. почта: adm@nt-rt.ru || Сайт: <http://lambda.nt-rt.ru/>