


Технические характеристики на преобразователи напряжения DC/DC серии CN-A

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Брянск (4832)59-03-52
Вологда (8172)26-41-59
Иваново (4932)77-34-06
Калининград (4012)72-03-81
Киров (8332)68-02-04
Курск (4712)77-13-04
Москва (495)268-04-70
Нижний Новгород (831)429-08-12
Орел (4862)44-53-42
Пермь (342)205-81-47
Самара (846)206-03-16
Смоленск (4812)29-41-54
Тверь (4822)63-31-35
Тюмень (3452)66-21-18
Челябинск (351)202-03-61

Астана +7(7172)727-132
Владивосток (423)249-28-31
Воронеж (473)204-51-73
Ижевск (3412)26-03-58
Калуга (4842)92-23-67
Краснодар (861)203-40-90
Липецк (4742)52-20-81
Мурманск (8152)59-64-93
Новокузнецк (3843)20-46-81
Оренбург (3532)37-68-04
Ростов-на-Дону (863)308-18-15
Санкт-Петербург (812)309-46-40
Сочи (862)225-72-31
Томск (3822)98-41-53
Ульяновск (8422)24-23-59
Череповец (8202)49-02-64

Белгород (4722)40-23-64
Волгоград (844)278-03-48
Екатеринбург (343)384-55-89
Казань (843)206-01-48
Кемерово (3842)65-04-62
Красноярск (391)204-63-61
Магнитогорск (3519)55-03-13
Набережные Челны (8552)20-53-41
Новосибирск (383)227-86-73
Пенза (8412)22-31-16
Рязань (4912)46-61-64
Саратов (845)249-38-78
Ставрополь (8652)20-65-13
Тула (4872)74-02-29
Уфа (347)229-48-12
Ярославль (4852)69-52-93

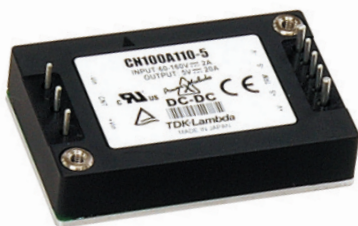

- 60 - 160VDC Input to EN50155/IEC60571
- EN/IEC 61373 Shock and Vibration
- Base plate Cooled
- Full Power at +100°C base plate
- Five Year Warranty

Key Market Segments & Applications

Railway Applications
Suitable for battery powered railway systems
Power Plants

CN-A Series

30W to 200W 110VDC Input
Quarter Brick & Half Brick Railway DC-DC Converters

CN-A Features and Benefits

Features

- Small Size
- Quarter & Half Brick Footprint
- Full Power from -40°C to +100°C
- UVLO Function
- Coating Option

Benefits

- Less PCB space used
- Industry Standard size
- No Derating required - covers TX class for Railway
- Protects battery against deep discharges
- According to EN50155

Specifications

ITEMS		MODELS	CN30A110, CN50A110, CN100A110, CN200A110 See model selector			
Nominal Output Voltage	VDC		5V	12V	15V	24V
Input Voltage Range (1)	VDC		60 - 160VDC			
Input Current	A		0.34 - 2.16A (model dependant)			
Output Voltage Adjustment	VDC		4.5 - 6	10.8 - 13.2	13.5 - 16.5	21.6 - 26.4
Ripple & Noise (max) pk-pk	mV		100	150	150	240
Line Regulation (max)	mV		20	48	60	96
Load Regulation (max)	mV		40	96	120	192
Overcurrent Protection	%		105 - 140%			
Overvoltage Protection	%		125 - 145% (Cycle input or remote on/off to reset)			
Remote Sense	-		Yes			
Remote On/Off	-		Yes; Low = ON, Open = OFF			
Parallel Operation	-		CN30,50 & 100 : No / CN200 : 5V : No; 12, 15, 24V : Yes			
Operating Temperature	°C		-40°C to +100°C Baseplate			
Storage Temperature	°C		-40°C to +100°C			
Temperature Coefficient	%/°C		0.02%/°C			
Humidity (non condensing)	%RH		5 - 95% RH Operating and Non Operating			
Conformal Coating (1)	-		Optional - /CO suffix			
Cooling	-		Conduction (See Installation Manual for heatsink selection)			
Withstand Voltage	VAC		Input to Baseplate: 1.5kVAC; Input to Output 3.0kVAC for 1 min.; Output to Baseplate: 500VAC for 1 min			
Isolation Resistance	Ω		>100MΩ at 25°C and 70%RH, Output to Base plate 500VDC			
Vibration (1)	-		Non Operating, 10-55Hz (sweep for 1 min.) Amplitude 0.825mm constant (Max 49 m/s ²) X,Y,Z 1 hour each IEC61373 - Category 1, Grade B			
Shock (1)	-		196.1m/s ² , EN/IEC61373 - Category 1, Grade B			
Safety Agency Certifications	-		UL60950-1, CSA60950-1, EN60950-1, CE LVD			
Weight (Typ)	g		CN30-50 : 70 / CN200 : 100			
Size (WxHxD)	mm		CN30A - 100A : 36.8 x 12.7 x 57.9, CN200A : 61 x 12.7 x 57.9			
Warranty	yrs		5			


Notes: See Installation Manual for full details, test methods of parameters and application notes
(1) Compliance to EN50155 & IEC60571

Model Selector


Model	Voltage (V)	Output Current (A)	Maximum Power (W)	Input Current (A)	Efficiency (%) (100% load, 110VDC In)
CN30A110-5	5	6.0	30.0	0.34	83
CN50A110-5	5	10.0	50.0	0.55	85
CN100A110-5	5	20.0	100.0	1.08	85
CN200A110-5	5	40.0	200.0	2.16	85
CN30A110-12	12	2.5	30.0	0.34	84
CN50A110-12	12	4.2	50.4	0.55	86
CN100A110-12	12	8.4	100.8	1.05	88
CN200A110-12	12	16.7	200.4	2.09	88
CN30A110-15	15	2.0	30.0	0.34	84
CN50A110-15	15	3.4	51.0	0.55	86
CN100A110-15	15	6.7	100.5	1.05	88
CN200A110-15	15	13.4	201	2.1	88
CN30A110-24	24	1.3	31.2	0.34	84
CN50A110-24	24	2.1	50.4	0.55	86
CN100A110-24	24	4.2	100.8	1.05	88
CN200A110-24	24	8.4	201.6	2.11	88

Option: Conformal coating for EN50155 & IEC60571 compliance: add /CO suffix to model name

Outline Drawing CN30A-CN100A

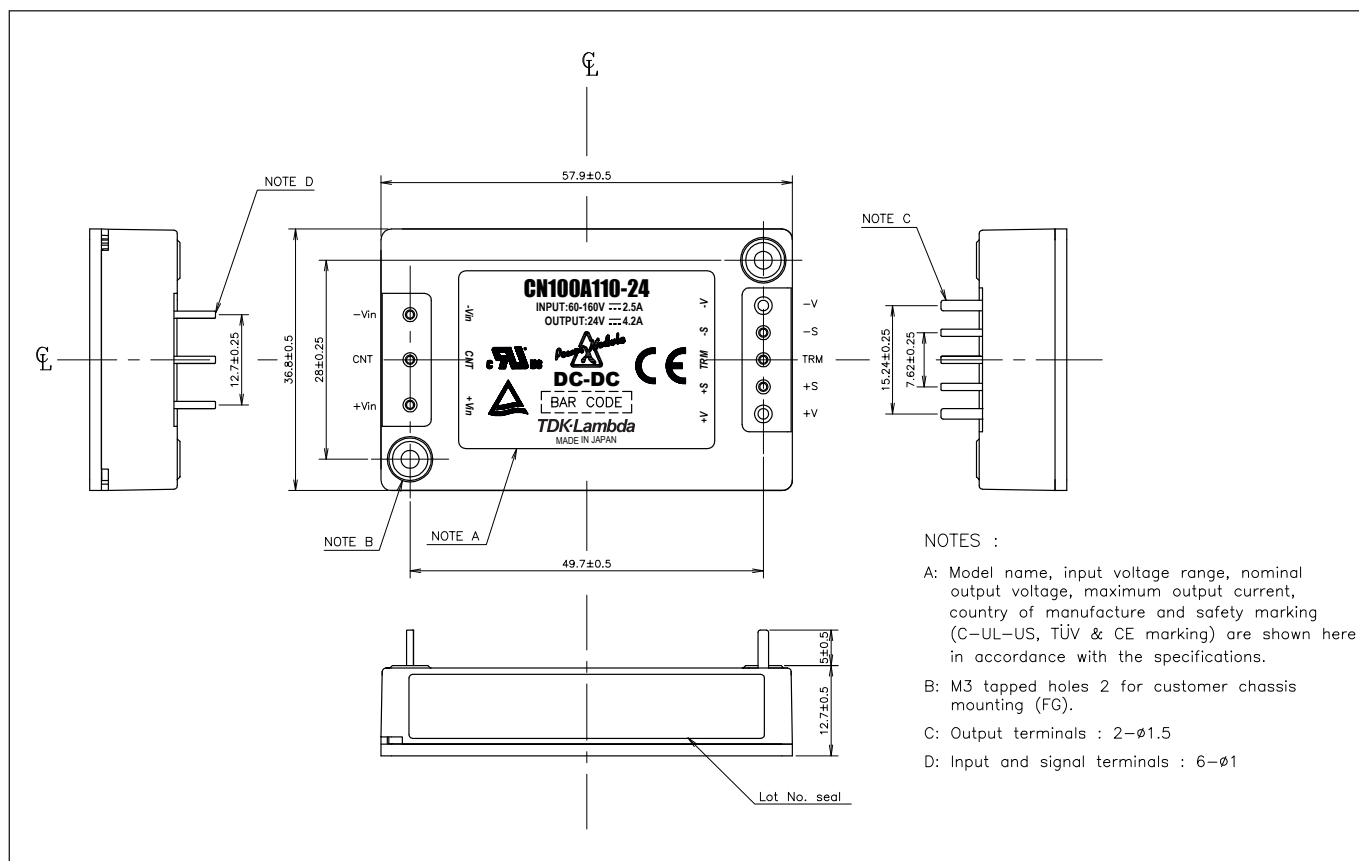

Outline Drawing CN200A

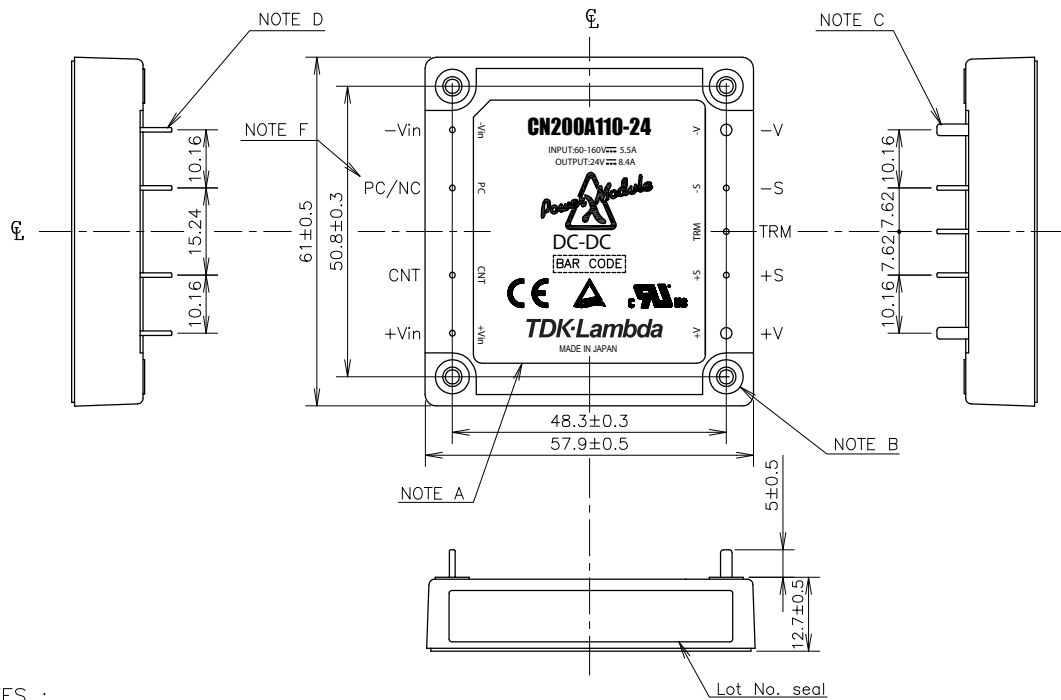

NOTES :

- A: Model name, input voltage range, nominal output voltage, maximum output current, country of manufacture and safety marking (C-UL-US, TÜV & CE marking) are shown here in accordance with the specifications.
- B: M3 tapped holes 4 for customer chassis mounting (FG).
- C: Output terminals : 2- ϕ 2.0
- D: Input and signal terminals : 7- ϕ 1
- E: Unless otherwise specified dimensional tolerance : ± 0.25
- F: 5V output model : NC
12V, 15V, 24V output models : PC

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Брянск (4832)59-03-52
Вологда (8172)26-41-59
Иваново (4932)77-34-06
Калининград (4012)72-03-81
Киров (8332)68-02-04
Курск (4712)77-13-04
Москва (495)268-04-70
Нижний Новгород (831)429-08-12
Орел (4862)44-53-42
Пермь (342)205-81-47
Самара (846)206-03-16
Смоленск (4812)29-41-54
Тверь (4822)63-31-35
Тюмень (3452)66-21-18
Челябинск (351)202-03-61

Астана +7(7172)727-132
Владивосток (423)249-28-31
Воронеж (473)204-51-73
Ижевск (3412)26-03-58
Калуга (4842)92-23-67
Краснодар (861)203-40-90
Липецк (4742)52-20-81
Мурманск (8152)59-64-93
Новокузнецк (3843)20-46-81
Оренбург (3532)37-68-04
Ростов-на-Дону (863)308-18-15
Санкт-Петербург (812)309-46-40
Сочи (862)225-72-31
Томск (3822)98-41-53
Ульяновск (8422)24-23-59
Череповец (8202)49-02-64

Белгород (4722)40-23-64
Волгоград (844)278-03-48
Екатеринбург (343)384-55-89
Казань (843)206-01-48
Кемерово (3842)65-04-62
Красноярск (391)204-63-61
Магнитогорск (3519)55-03-13
Набережные Челны (8552)20-53-41
Новосибирск (383)227-86-73
Пенза (8412)22-31-16
Рязань (4912)46-61-64
Саратов (845)249-38-78
Ставрополь (8652)20-65-13
Тула (4872)74-02-29
Уфа (347)229-48-12
Ярославль (4852)69-52-93

Эл. почта: adm@nt-rt.ru || Сайт: <http://lambda.nt-rt.ru/>