

Технические характеристики на источники питания AC/DC серии CUS350M

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Брянск (4832)59-03-52
Вологда (8172)26-41-59
Иваново (4932)77-34-06
Калининград (4012)72-03-81
Киров (8332)68-02-04
Курск (4712)77-13-04
Москва (495)268-04-70
Нижний Новгород (831)429-08-12
Орел (4862)44-53-42
Пермь (342)205-81-47
Самара (846)206-03-16
Смоленск (4812)29-41-54
Тверь (4822)63-31-35
Тюмень (3452)66-21-18
Челябинск (351)202-03-61

Астана +7(7172)727-132
Владивосток (423)249-28-31
Воронеж (473)204-51-73
Ижевск (3412)26-03-58
Калуга (4842)92-23-67
Краснодар (861)203-40-90
Липецк (4742)52-20-81
Мурманск (8152)59-64-93
Новокузнецк (3843)20-46-81
Оренбург (3532)37-68-04
Ростов-на-Дону (863)308-18-15
Санкт-Петербург (812)309-46-40
Сочи (862)225-72-31
Томск (3822)98-41-53
Ульяновск (8422)24-23-59
Череповец (8202)49-02-64

Белгород (4722)40-23-64
Волгоград (844)278-03-48
Екатеринбург (343)384-55-89
Казань (843)206-01-48
Кемерово (3842)65-04-62
Красноярск (391)204-63-61
Магнитогорск (3519)55-03-13
Набережные Челны (8552)20-53-41
Новосибирск (383)227-86-73
Пенза (8412)22-31-16
Рязань (4912)46-61-64
Саратов (845)249-38-78
Ставрополь (8652)20-65-13
Тула (4872)74-02-29
Уфа (347)229-48-12
Ярославль (4852)69-52-93

Эл. почта: adm@nt-rt.ru || Сайт: <http://lambda.nt-rt.ru/>



Medical



Industrial



Test



Comm



Broadcast

Single Output 350W/420W Medical & ITE Power Supplies

Features	Benefits
• IEC60601 3rd Ed. (2x MoPP)	• Suitable for B and BF type medical equipment
• 350W Convection cooled rating	• No fan noise, good for noise-sensitive environments
• Low profile (40 mm)	• Suits 1U applications, saves space
• Low off-load power consumption (<0.5W)	• Better "environmental footprint"
• 5V Aux & 12V fan supply (F-option)	• Embedded features save cost of external circuitry
• Operating altitude up to 5000m	• Supports global use



Specification		
Model		CUS350M/F
AC Input Voltage	VAC	85 - 265VAC (1)
Input Frequency	Hz	47 - 63Hz
DC Input Voltage	VDC	120 - 370VDC (No safety certification)
Inrush Current (cold start)	A	20A at 115VAC, 40A at 230VAC
Power Factor	-	Meets EN61000-3-2 (Typical PF 0.99/0.95) (2)
Input Current (115/230VAC)	A	4 / 2A (350W output)
Off-load Power Consumption (3)	W	<0.5W at 230VAC
Temperature Coefficient	%/°C	<0.02%/°C
Overcurrent Protection	-	12V: >38A, 18V: > 26A, 24V: > 20A, 36V: > 13, 48V: > 9.7A
Overvoltage Protection (4)	V	12V: 13.8 - 16.2V, 18V: 20.7 - 24.3V, 24V: 27.6 - 32.4V, 36V: 41.4 - 48.6V, 48V: 55.2 - 64.8V
Hold Up Time (115 / 230V input)	ms	20ms at 350W output
Leakage Current	mA	<0.3mA
Remote Sense	-	Yes
Remote On/Off	-	Yes: Apply voltage to isolated terminals to shut unit down
Power Good	-	Yes: Isolated transistor, On = Good
Operating Temperature	°C	-20°C to +70°C Derate linearly to 50% load from 40°C to 70°C
Storage Temperature	°C	-40°C to +85°C
Humidity (non condensing)	%RH	10 - 95%RH (Operating & Storage)
Cooling	-	Convection or Forced Air Cooled
Withstand Voltage	-	Input to Ground 2kVAC (1xMOPP), Input to Output 4kVAC (2xMOPPs), Output to Ground 1.5kVAC (1xMOPP)*
Isolation Resistance	-	>100MΩ at 25°C & 70%RH, Output to Ground 500VDC
Vibration (non operating)	-	10 - 55Hz: 19.6m/s ² constant sweep 1 min X, Y, Z for 1 hour
Shock	-	< 196.1 m/s ² (20G)
Immunity	-	IEC61000-4-2 (lv 2, 3), -3 (lv3), -4 (lv 3), -5 (lv3, 4), -6 (lv 3), -8 (lv 4), -11
Safety Agency Certifications	-	EN/IEC/UL/ES/CSA 60601-1, EN/IEC/UL/CSA60950-1, CE Mark
Conducted & Radiated EMI	-	EN55011-B, EN55022-B, FCC Class B (Radiated Class A)
Weight (Typ)	g	850
Size (LxWxH)	mm	190 x 87 x 40
Warranty	yrs	3

Notes:

(1) Derate linearly to 80% load from 115 to 85VAC input

(2) 115 / 230VAC input

(3) Refers to input power during remote off and standby, 5V & 12V fan supply at no load conditions

(4) Cycle AC to reset

* Suitable for B & BF rated medical equipment

Model Selector


Model	Voltage	Adjust Range (V)	Maximum Current (A) Convection	Maximum Power (W) Convection	Forced Air	Maximum Power (W) Forced Air	Ripple Noise (mV)	Efficiency (typical) % ⁽⁵⁾
CUS350M-12/F	12V	11.4 - 12.6	29.0	348.0	34.5	414.0	120	91 / 93
CUS350M-18/F	18V	17.1 - 18.9	19.4	349.2	23.0	414.0	180	91 / 94
CUS350M-24/F	24V	22.8 - 25.2	14.7	352.8	17.5	420.0	240	91 / 94
CUS350M-36/F	36V	34.2 - 37.8	9.7	349.2	11.5	414.0	360	91 / 93
CUS350M-48/F	48V	45.6 - 50.4	7.3	350.4	8.7	417.6	480	91 / 94

Notes: (5) 115 / 230VAC input. Convection and forced air ratings


Options (available on request)

Suffix "/F" Fan Supply & Power Good Signal Default model in EMEA


Outline Drawing CUS350M Series

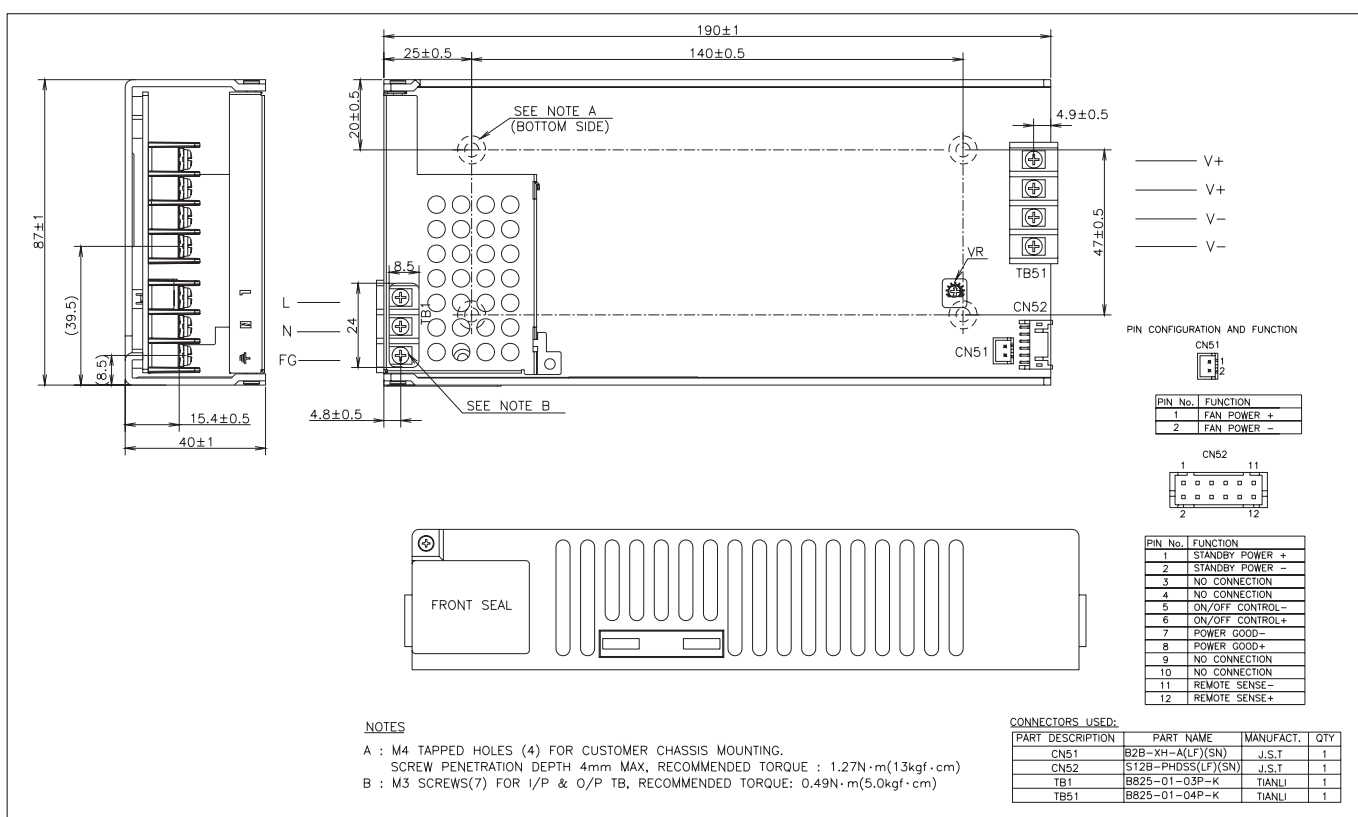

Output Derating Curve

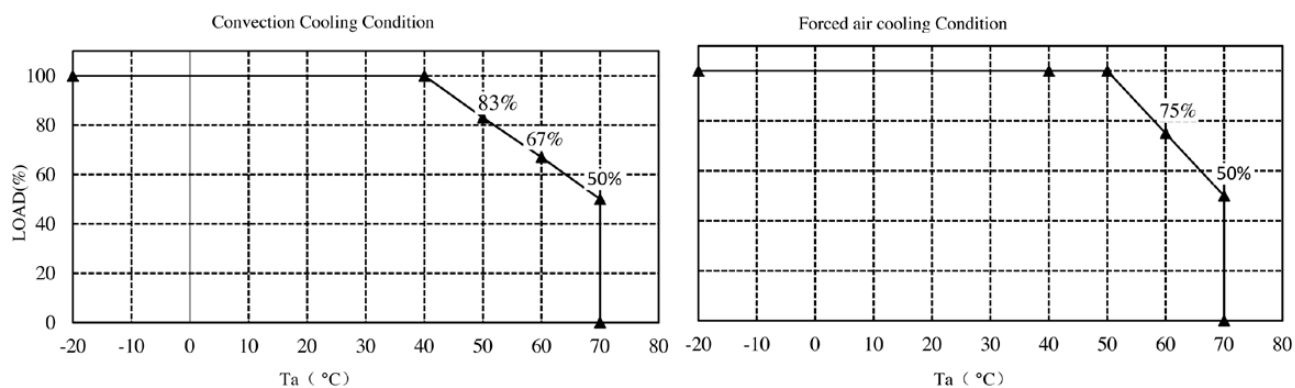

Output Derating versus Input Voltage

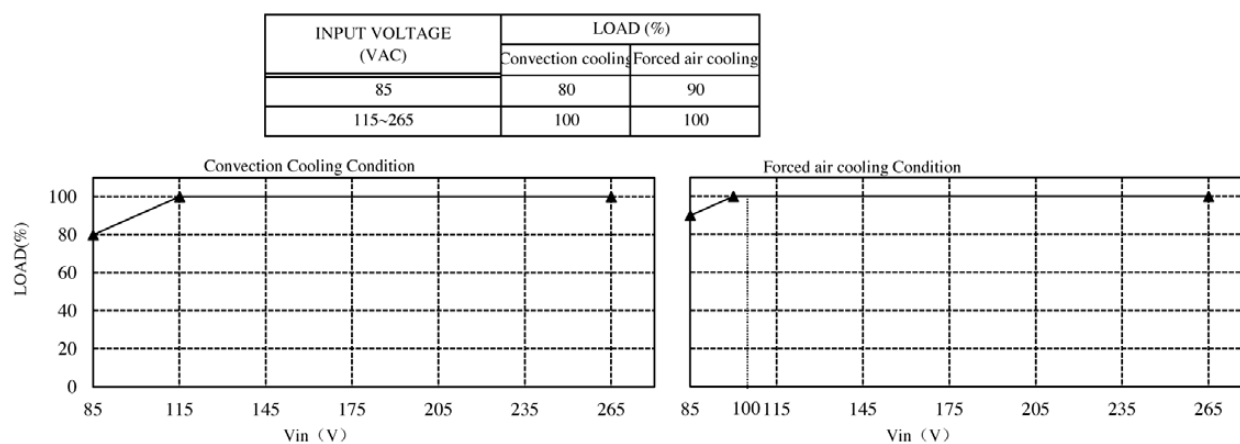

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Брянск (4832)59-03-52
Вологда (8172)26-41-59
Иваново (4932)77-34-06
Калининград (4012)72-03-81
Киров (8332)68-02-04
Курск (4712)77-13-04
Москва (495)268-04-70
Нижний Новгород (831)429-08-12
Орел (4862)44-53-42
Пермь (342)205-81-47
Самара (846)206-03-16
Смоленск (4812)29-41-54
Тверь (4822)63-31-35
Тюмень (3452)66-21-18
Челябинск (351)202-03-61

Астана +7(7172)727-132
Владивосток (423)249-28-31
Воронеж (473)204-51-73
Ижевск (3412)26-03-58
Калуга (4842)92-23-67
Краснодар (861)203-40-90
Липецк (4742)52-20-81
Мурманск (8152)59-64-93
Новокузнецк (3843)20-46-81
Оренбург (3532)37-68-04
Ростов-на-Дону (863)308-18-15
Санкт-Петербург (812)309-46-40
Сочи (862)225-72-31
Томск (3822)98-41-53
Ульяновск (8422)24-23-59
Череповец (8202)49-02-64

Белгород (4722)40-23-64
Волгоград (844)278-03-48
Екатеринбург (343)384-55-89
Казань (843)206-01-48
Кемерово (3842)65-04-62
Красноярск (391)204-63-61
Магнитогорск (3519)55-03-13
Набережные Челны (8552)20-53-41
Новосибирск (383)227-86-73
Пенза (8412)22-31-16
Рязань (4912)46-61-64
Саратов (845)249-38-78
Ставрополь (8652)20-65-13
Тула (4872)74-02-29
Уфа (347)229-48-12
Ярославль (4852)69-52-93