


Технические характеристики на источники питания AC/DC серии HWS

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Брянск (4832)59-03-52
Вологда (8172)26-41-59
Иваново (4932)77-34-06
Калининград (4012)72-03-81
Киров (8332)68-02-04
Курск (4712)77-13-04
Москва (495)268-04-70
Нижний Новгород (831)429-08-12
Орел (4862)44-53-42
Пермь (342)205-81-47
Самара (846)206-03-16
Смоленск (4812)29-41-54
Тверь (4822)63-31-35
Тюмень (3452)66-21-18
Челябинск (351)202-03-61

Астана +7(7172)727-132
Владивосток (423)249-28-31
Воронеж (473)204-51-73
Ижевск (3412)26-03-58
Калуга (4842)92-23-67
Краснодар (861)203-40-90
Липецк (4742)52-20-81
Мурманск (8152)59-64-93
Новокузнецк (3843)20-46-81
Оренбург (3532)37-68-04
Ростов-на-Дону (863)308-18-15
Санкт-Петербург (812)309-46-40
Сочи (862)225-72-31
Томск (3822)98-41-53
Ульяновск (8422)24-23-59
Череповец (8202)49-02-64

Белгород (4722)40-23-64
Волгоград (844)278-03-48
Екатеринбург (343)384-55-89
Казань (843)206-01-48
Кемерово (3842)65-04-62
Красноярск (391)204-63-61
Магнитогорск (3519)55-03-13
Набережные Челны (8552)20-53-41
Новосибирск (383)227-86-73
Пенза (8412)22-31-16
Рязань (4912)46-61-64
Саратов (845)249-38-78
Ставрополь (8652)20-65-13
Тула (4872)74-02-29
Уфа (347)229-48-12
Ярославль (4852)69-52-93

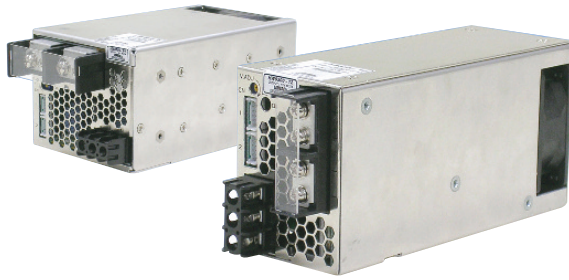

- Limited Lifetime Warranty
- UL508 Approved
- SEMI F47 Compliant (high line AC)
- Universal Input (85 - 265VAC)
- High Efficiency
- RoHS Compliant Design

Key Market Segments & Applications

Factory Automation
Test & Measurement
Automated Service

HWS300-1500 Series

Single Output Industrial
Power Supplies

HWS300-1500 Features and Benefits

Features

- Limited Lifetime Warranty
- High Efficiency
- Wide Range AC Input

Benefits

- Lower Cost of Ownership
- Easier System Cooling
- Supports Global Use

Specifications

MODEL		HWS300	HWS600	HWS1000	HWS1500
ITEMS					
Input Voltage range (47-63Hz)	-	85 - 265VAC or 120 - 330VDC			
Input Current (Typ) (1)	A	5V: 3.8/1.9; 12-48V: 4.2/2.1	5V: 7.5/3.6; 12-48V: 8.1/3.9	3.3V: 9.6/5.0; 5-60V: 13.5/7.0	3.3V: 15/8 5-60V: 19/10
Inrush Current (1)	A	20 / 40			
Power Factor	-	Meets EN61000-3-2			
Temperature Coefficient	-	<0.02%/°C			
Overcurrent Protection	-	>105% (>101% of peak current for peak current capable models)			
Overvoltage Protection	V	See table on page 2 (Recycle AC or remote on/off to reset)			
Hold Up Time (Typ)	ms	20 (HWS1500-7 - 16ms)			
Leakage Curr. (at 240VAC, 60Hz)	mA	<0.75mA		<1.2mA	<1.5mA
Remote Sense	-	Yes			
Indicator	-	Green LED = ON			
Remote on/off	-	Yes (Isolated from output)			
Parallel operation	-	Single wire connection (up to 5 units)			
DC Good	-	Yes			
Remote Adjust (PV)	-	External voltage adjusts output, see options table			
Operating Temperature	°C	-10 to +70°C, derate linearly to 50% load from 50 to 70 (2, 3)			
Storage Temperature	°C	-30 to +85°C			
Humidity (non condensing)	-	Operating: 10 - 90%RH, Non operating 10 - 95%RH			
Cooling	-	Internal fan			
Withstand Voltage (4)	-	Input to Ground 2.5kVAC, Input to Output 3kVAC, Output to Ground 500VAC for 1 min.			
Isolation Resistance	-	>100MΩ at 25°C & 70%RH, Output to Ground 500VDC			
Vibration (non operating)	-	10 - 55Hz (1 minute sweep), 19.6m/s ² constant X, Y, Z 1 hour			
Shock	-	< 196.1 m/s ²			
Safety Agency Approvals (5)	-	UL60950-1, CSA60950-1, EN60950-1, EN50178, UL508, CE Mark			
Line Dip	-	Complies with SEMI F47 (200VAC line only)			
Conducted & Radiated EMI	-	EN55011 / EN55022, FCC VCCI (HWS300, 600 & 1000: Class B, HWS1500: Class A)			
Recommended EMI Filter	-	RSEN-2006	RSEN-2010	RSEN-2020	RSEN-2030
Immunity	-	IEC61000-4-2, -3, -4, -6 (Level 3), -5, -8 (Level 4), -11			
Weight (Typ)	g	1,000	1,600	3,200	3,800
Size	mm	61 x 82 x 165	100 x 82 x 165	240 x 126.5 x 82	280 x 126.5 x 82
MTBF (6)	hrs	2,145,809	1,998,996	1,087,031	1,152,309
Warranty	yrs	Limited Lifetime Warranty			

Model Selector											
Model	Voltage V	Adjust Range V(3)	Max Curr. A	Peak Curr. A(2)	Max. Pwr. W	Peak Power W	Load Reg mV	Line Reg mV	Ripple Noise mV	Over- voltage V	Eff. typ % (1)
HWS300-3	3.3V	2.64 - 3.96	60	-	198		30	20	120	4.13 - 4.95	74/77
HWS600-3	3.3V	2.64 - 3.96	120	-	396		30	20	120	4.13 - 4.95	75/78
HWS1000-3	3.3V	2.64 - 3.96	200		660		40	20	120	4.13 - 4.62	71/73
HWS1500-3	3.3V	2.64 - 3.96	300		990		60	36	150	4.12 - 4.62	72/75
HWS300-5	5V	4 - 6	60	-	300		30	20	120	6.25 - 7.25	79/82
HWS600-5	5V	4 - 6	120	-	600		30	20	120	6.25 - 7.25	80/83
HWS1000-5	5V	4 - 6	200		1000		40	20	120	6.25 - 7	76/78
HWS1500-5	5V	4 - 6	300		1500		60	36	150	4.0 - 6.0	77/81
HWS1000-6	6V	4.8 - 7.2	167		1002		60	36	150	7.5 - 8.4	79/81
HWS1500-6	6V	4.8 - 7.2	250	300	1500	1800	60	40	150	4.8 - 7.2	79/82
HWS1000-7	7.5V	6 - 9V	134	160	1005	1200	60	36	150	9.38 - 10.5	80/82
HWS1500-7	7.5V	6 - 9V	200	240	1500	1800	60	40	150	6.0 - 9.0	81/83
HWS300-12	12V	9.6 - 14.4	27	-	324		72	48	150	15 - 17.4	80/83
HWS600-12	12V	9.6 - 14.4	53	-	636		72	48	150	15 - 17.4	80/83
HWS1000-12	12V	9.6 - 14.4	88	100	1056	1200	100	48	150	15 - 17.4	82/85
HWS1500-12	12V	9.6 - 14.4	125	-	1500		72	48	150	15 - 17.4	82/85
HWS300-15	15V	12 - 18	22	-	330		90	60	150	18.8 - 21.8	80/83
HWS600-15	15V	12 - 18	43	-	645		90	60	150	18.8 - 21.8	81/84
HWS1000-15	15V	12 - 18	70	80	1050	1200	120	60	150	18.8 - 21.8	83/85
HWS1500-15	15V	12 - 18	100	-	1500		90	60	150	18.7 - 21.8	83/87
HWS300-24	24V	19.2 - 28.8	14	16.5	336	396	144	96	150	30 - 34.8	82/85
HWS600-24	24V	19.2 - 28.8	27	31	648	744	144	96	150	30 - 34.8	82/85
HWS1000-24	24V	19.2 - 28.8	46	58.5	1104	1404	150	96	150	30 - 34.8	85/87
HWS1500-24	24V	19.2 - 28.8	65/70 (1)	105	1560	2520	144	96	200	30 - 34.8	84/88
HWS1000-36	36V	28.8 - 43.2	30.7	39	1104	1404	150	144	200	45 - 49.7	85/88
HWS1500-36	36V	28.8 - 43.2	42/46.5 (1)	70	1512	2520	150	144	200	45 - 49.7	84/88
HWS300-48	48V	38.4 - 52.8	7	-	336		288	192	350	55.2 - 64.8	82/85
HWS600-48	48V	38.4 - 52.8	13	-	624		288	192	350	55.2 - 64.8	83/86
HWS1000-48	48V	38.4 - 52.8	23	29	1104	1404	300	192	200	55.2 - 64.8	86/88
HWS1500-48	48V	38.4 - 52.8	32	-	1536		288	192	200	55.2 - 64.8	86/90
HWS1000-60	60V	48 - 66	18.4	23.4	1104	1404	360	240	400	69 - 75	85/88
HWS1500-60	60V	48 - 66	28	42	1536	2520	360	240	400	69 - 75	86/90

Notes





- (1) 100/200VAC
 (2) 200-265VAC Input, 10s maximum on time with 35% duty cycle
 (3) Use program input (PV) to adjust from 20-120% of nominal (20-110% for 48V models)

Options	
Suffix	Description
Blank	HWS300-1500 the cover is fitted as standard
/A	Not Applicable
/PV	HWS300, 600 (Standard on HWS1000 & 1500 all output voltages): 1-6V program voltage input to adjust output 20-120% of nominal (20-110% for 48V) (12V-48V models only for 300 & 600W):
/HD	See HWS30-1500/HD Datasheet for details. -40 to +71(74)°C operation, conformally coated PCBs
/ME	See HWS30-1500/ME Datasheet for details. UL60601-1, EN60601-1 medical approvals

Specification Notes (See Page 1):

- (1) 100/200VAC
 (2) HWS start up -20°C. (-40°C see options table)
 (3) HWS1000/1500 with 85VAC input:
 See installation manual
 HWS1000: -10 to +71°C.
 HWS1000-5 derate linearly above 40°C
 (4) 2kVAC HWS1000/1500 Input to ground
 (5) UL60601-1, EN60601-1, see options.
 UL508; HWS300/600 5V, 12V, 24V & 48V models
 (6) According to Telcordia document SR-332, issue 3
 "Reliability Prediction Procedure for Electronic Equipment"
 Conditions: ambient temp. 25°C, 230Vac input, full load
 (figures shown for 24V models)

Outline Drawing HWS300 -1500 Series

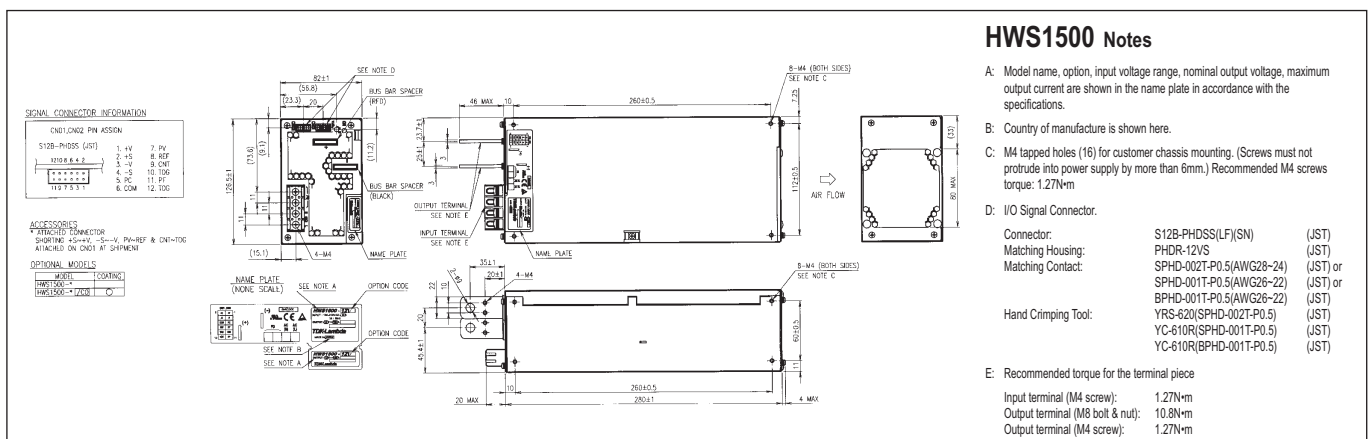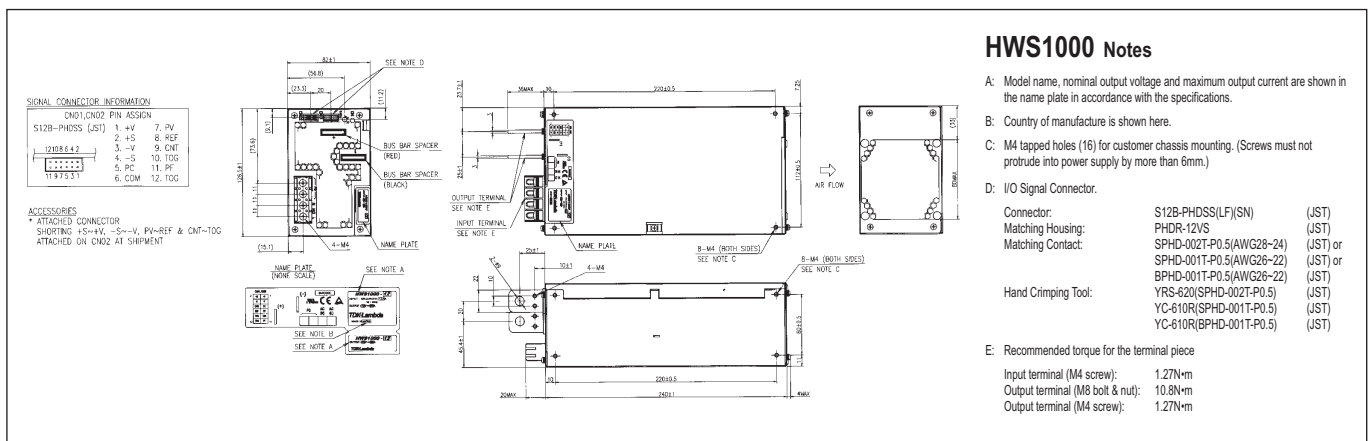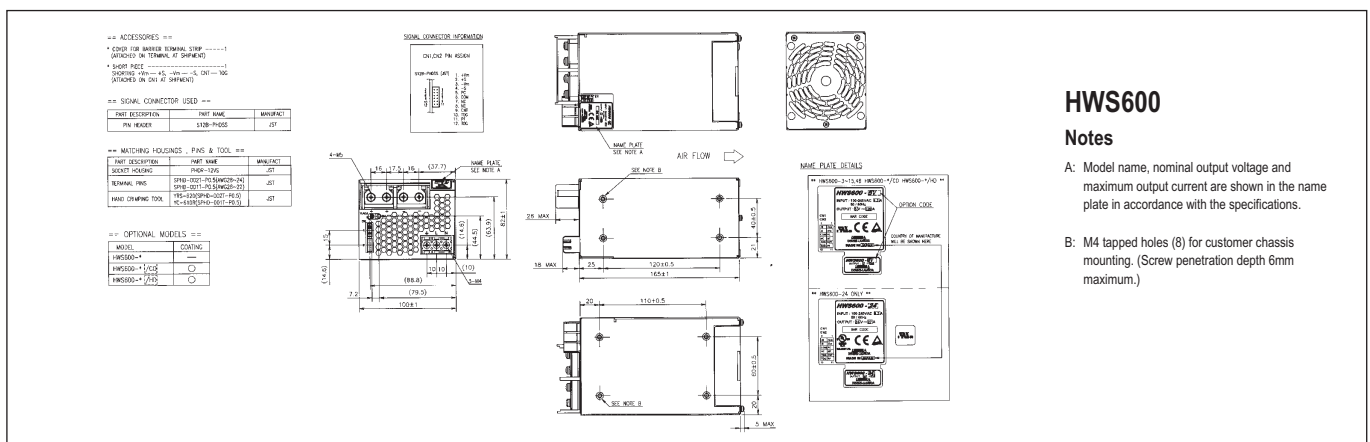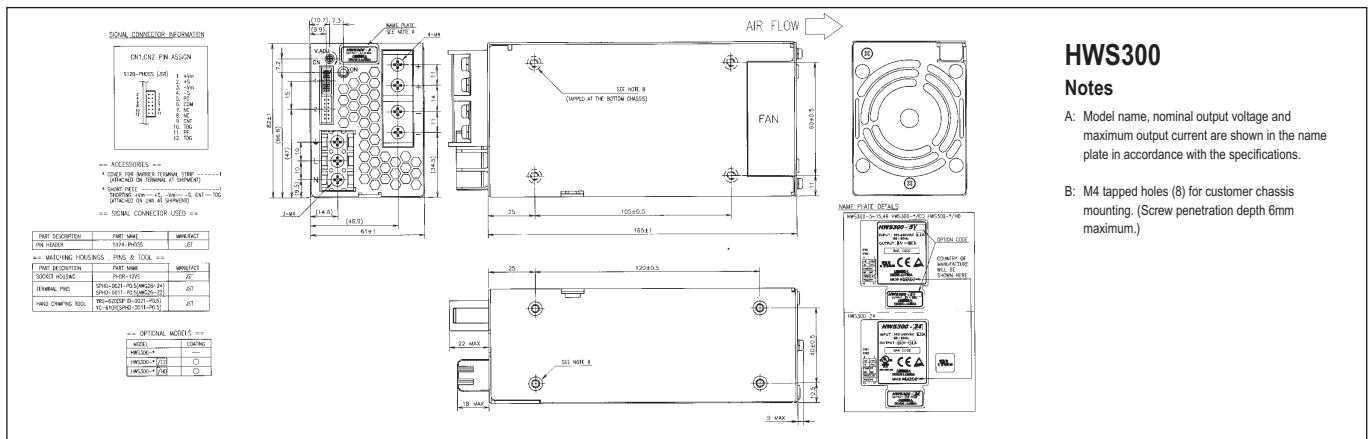

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Брянск (4832)59-03-52
Вологда (8172)26-41-59
Иваново (4932)77-34-06
Калининград (4012)72-03-81
Киров (8332)68-02-04
Курск (4712)77-13-04
Москва (495)268-04-70
Нижний Новгород (831)429-08-12
Орел (4862)44-53-42
Пермь (342)205-81-47
Самара (846)206-03-16
Смоленск (4812)29-41-54
Тверь (4822)63-31-35
Тюмень (3452)66-21-18
Челябинск (351)202-03-61

Астана +7(7172)727-132
Владивосток (423)249-28-31
Воронеж (473)204-51-73
Ижевск (3412)26-03-58
Калуга (4842)92-23-67
Краснодар (861)203-40-90
Липецк (4742)52-20-81
Мурманск (8152)59-64-93
Новокузнецк (3843)20-46-81
Оренбург (3532)37-68-04
Ростов-на-Дону (863)308-18-15
Санкт-Петербург (812)309-46-40
Сочи (862)225-72-31
Томск (3822)98-41-53
Ульяновск (8422)24-23-59
Череповец (8202)49-02-64

Белгород (4722)40-23-64
Волгоград (844)278-03-48
Екатеринбург (343)384-55-89
Казань (843)206-01-48
Кемерово (3842)65-04-62
Красноярск (391)204-63-61
Магнитогорск (3519)55-03-13
Набережные Челны (8552)20-53-41
Новосибирск (383)227-86-73
Пенза (8412)22-31-16
Рязань (4912)46-61-64
Саратов (845)249-38-78
Ставрополь (8652)20-65-13
Тула (4872)74-02-29
Уфа (347)229-48-12
Ярославль (4852)69-52-93

Эл. почта: adm@nt-rt.ru || Сайт: <http://lambda.nt-rt.ru/>