




Model name

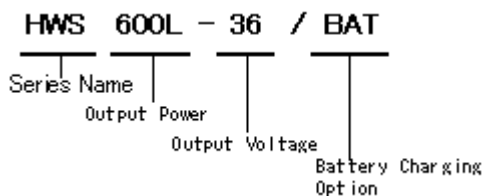

Features

- Constant current power supply whose current and maximum charge voltage can be adjusted by the embedded trimmer.
- Capable of handling constant current and constant voltage charging. Optimal for charging many kinds of rechargeable batteries.
- Capable of handling both 24V and 48V secondary batteries. Available in 600W and 1,000W types, total 4 models.
- Parallel operation
- Small form factor just like the HWS series

Model	HWS600L-36/BAT	HWS600L-60/BAT	HWS1000L-36/BAT	HWS1000L-60/BAT
Input Voltage Range	AC85-265V(47-63Hz) or DC120-350V			
Maximum Output Power	648W	600W	1044W	1020W
Constant Voltage Mode Adjustable Range (At Shipment)	28—36VDC (36VDC)	48—60VDC (60VDC)	28—36VDC (36VDC)	48—60VDC (60VDC)
Constant Current Mode Adjustable Range (At Shipment)	9.9—17.1ADC (15.3—17.1ADC)	5.5—9.5ADC (8.5—9.5ADC)	15.9—27.6ADC (24.7—27.6ADC)	9.3—16.2ADC (14.5—16.2ADC)
External Control	Analog control possible for voltage only			
Parallel Operation	Possible			
Operating Temperature	-20 to +74°C (-20 to +50°C : 100%, +74°C :50%)			
Safety	Approved by UL60950-1, CSA60950-1, EN60950-1, EN50178 Built to meet DENAN, EN61010-1		Approved by UL60950-1, CSA60950-1, EN60950-1, EN50178, UL60601-1, EN60601-1, CSA-C22.2 No.601.1-M90 Built to meet DENAN, EN61010-1	
EMI	Built to meet VCCI-B, FCC-B, EN55011/EN55022-B		Built to meet VCCI-A, FCC-A, EN55011/EN55022-A	
Weight	1.6kg		2.3kg	
Dimension(WxHxD)mm	120 x 61 x 190		150 x 61 x 240	

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
 Астана +7(7172)727-132
 Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89
 Иваново (4932)77-34-06
 Ижевск (3412)26-03-58
 Казань (843)206-01-48

Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курск (4712)77-13-04
 Липецк (4742)52-20-81
 Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41
 Нижний Новгород (831)429-08-12
 Новокузнецк (3843)20-46-81

Новосибирск (383)227-86-73
 Омск (3812)21-46-40
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16
 Пермь (342)205-81-47
 Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Санкт-Петербург (812)309-46-40
 Саратов (845)249-38-78
 Севастополь (8692)22-31-93
 Симферополь (3652)67-13-56
 Смоленск (4812)29-41-54

Сочи (862)225-72-31
 Ставрополь (8652)20-65-13
 Сургут (3462)77-98-35
 Тверь (4822)63-31-35
 Томск (3822)98-41-53
 Тула (4872)74-02-29
 Тюмень (3452)66-21-18
 Ульяновск (8422)24-23-59
 Уфа (347)229-48-12
 Хабаровск (4212)92-98-04
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Ярославль (4852)69-52-93