

Технические характеристики на источники питания AC/DC серии ZMS

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Брянск (4832)59-03-52
Вологда (8172)26-41-59
Иваново (4932)77-34-06
Калининград (4012)72-03-81
Киров (8332)68-02-04
Курск (4712)77-13-04
Москва (495)268-04-70
Нижний Новгород (831)429-08-12
Орел (4862)44-53-42
Пермь (342)205-81-47
Самара (846)206-03-16
Смоленск (4812)29-41-54
Тверь (4822)63-31-35
Тюмень (3452)66-21-18
Челябинск (351)202-03-61


Астана +7(7172)727-132
Владивосток (423)249-28-31
Воронеж (473)204-51-73
Ижевск (3412)26-03-58
Калуга (4842)92-23-67
Краснодар (861)203-40-90
Липецк (4742)52-20-81
Мурманск (8152)59-64-93
Новокузнецк (3843)20-46-81
Оренбург (3532)37-68-04
Ростов-на-Дону (863)308-18-15
Санкт-Петербург (812)309-46-40
Сочи (862)225-72-31
Томск (3822)98-41-53
Ульяновск (8422)24-23-59
Череповец (8202)49-02-64

Белгород (4722)40-23-64
Волгоград (844)278-03-48
Екатеринбург (343)384-55-89
Казань (843)206-01-48
Кемерово (3842)65-04-62
Красноярск (391)204-63-61
Магнитогорск (3519)55-03-13
Набережные Челны (8552)20-53-41
Новосибирск (383)227-86-73
Пенза (8412)22-31-16
Рязань (4912)46-61-64
Саратов (845)249-38-78
Ставрополь (8652)20-65-13
Тула (4872)74-02-29
Уфа (347)229-48-12
Ярославль (4852)69-52-93



80W Convection, 100W Forced-Air Cooled Single Output Power Supplies

Features	Benefits
• Long e-cap lifetime	• Better field reliability and service life
• Compact 2 x 4 inch footprint	• Space saving in end equipment
• Medical approval with 2 x MoPP isolation	• Suitable for B and BF type medical equipment
• Suitable for Class I and Class II installations	• Flexible utilisation
• Ceramic start-up cap	• Eradicates start-up cap dry out problems

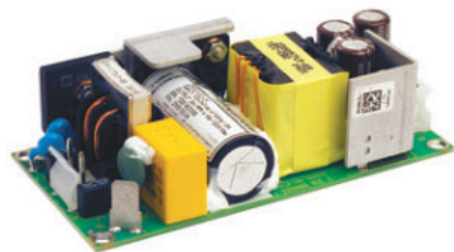


Specification ⁽¹⁾		
Model		ZMS100
AC Input Voltage range (2) (4)	-	85 - 264VAC (47-63Hz) 120 - 350VDC
Input Fusing		Line and neutral
Input Current (Typ) (230V/115Vac)	A	1.0 / 2.0
Inrush Current - cold start	A	<40 (max at 264Vac input)
Harmonic Compliance	-	Compliant to EN/IEC61000-3-2 class A
Temperature Coefficient	-	<0.02% / °C
Typical Hold Up Time at 80W load, 115/230Vac	ms	22 / 108
Typical Hold Up Time at 100W load, 115/230Vac	ms	16 / 84 (see graphs for more detail)
Leakage Current	µA	<100µA at 100V 60Hz input, <250µA at 230V 50Hz
Touch Current (enclosure leakage)	µA	<100 µA
Cooling	-	80W with convection cooling, 100W max. with forced air cooling (see airflow rate graphs)
Efficiency	-	Up to 90% (see efficiency curves)
Operating Temperature	°C	-20°C to +70°C, derate linearly to 50% load from 50°C to 70°C
Storage Temperature	°C	-40°C to +85°C
Operational Altitude	-	5000m
Overcurrent Protection		hiccup (auto recovery)
Overvoltage Protection		Latching (unit shutdown, recycle mains to restart)
No Load Input Power at 230Vac	W	<0.5
Average Active Efficiency	%	>87
Humidity (non condensing)	RH	Operating and storage : 5 - 95% (non-condensing)
Withstand Voltage	-	Input to output 4kVac 2x MoPP, 1.5kVac input to ground 1x MoPP, 1.5kVac output to ground 1 x MoPP
Isolation Resistance	-	>100MΩ at 25°C & 70%RH
Isolation Class (3)		Construction suitable for Class II installations
Vibration	-	10 to 500Hz at 2G, EN60068-2-6 19.6m/s² Constant, X, Y, Z 1 hour each.
Shock	-	30G EN60068-2-27, -47, MIL-STD-810E
Approvals	-	IEC/EN/UL 60950-1, CSA22.2 No. 60950-1, IEC/EN 60601-1 (2nd & 3rd editions) CE mark Designed to meet IEC/EN/UL/CSA 61010-1, ANSI/AAMI ES60601-1:2005 (r) 2012 CQC safety standard GB4943.1-2011 (pending) ZMS100-12, 15 and 24 type tested to EN60335-1
Conducted & Radiated EMI		EN55011 / EN55022 level B conducted, level A radiated
Immunity (5)	-	EN 61000-4-2 (Level 3 criteria A) -3 (Level 3 criteria A) -4 (Level 3 criteria A), -5 (Level 3 criteria A), -6 (Level 3 criteria A), -8 (Level 3 criteria A), -11(class 3), -12(level 3) Meets the requirements of EN60601-1-2:2007 (as applicable to a component power supply)
Weight (Typ)	g	150
Size (W x L x H)	mm	50.8 x 101.6 x 31.9
Warranty	yrs	3
Connectivity		Molex as standard with separate ground faston Input Molex 10-63-4027, output Molex 09-65-2048

Notes: 1. Specification parameters apply at 25°C ambient temperature unless stated otherwise.
2. For 12V & 15V unit derate from 100% at 100V to 90% at 90V and to 80% at 85V, for 24V, 36V, & 48V unit derate from 100% at 90V to 90% at 85V. (convection and forced air ratings).
3. ZMS100 uses Y1 capacitors to earth. 4. Consult Sales Office for use under DC Input conditions 5. Criteria B for dips and interruptions, contact technical support for full details.


Model Selector									
Model	Nominal Output Voltage (V)	Output Adjust Range (V)	Maximum Current Convection (A)	Maximum Current Forced Air (A)	Maximum Output Power Convection (W)	Maximum Output power Forced Air (W)	Ripple ⁽⁶⁾ and noise (mv pk-pk)	Load Reg from 0 - full load (mv)	Line Reg from 85-264Vac (mv)
ZMS100-12	12	11.4 to 13.2	6.7	8.4	80.4	100.8	120	120	60
ZMS100-15	15	14.25 to 16.5	5.4	6.7	81.0	100.5	150	150	75
ZMS100-24	24	22.8 to 26.4	3.4	4.2	81.6	100.8	240	240	120
ZMS100-36	36	34.2 to 39.6	2.25	2.8	81.0	100.8	360	360	180
ZMS100-48	48	45.6 to 52.8	1.67	2.1	80.2	100.8	480	480	240

Note: 6. At 115Vac input, 25°C.



Output Derating ZMS100 Series Output

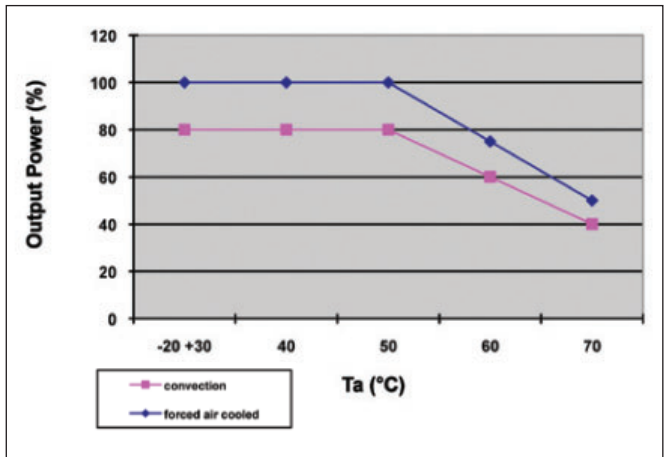




Minimum Required Airflow for ZMS100-24 at 100W

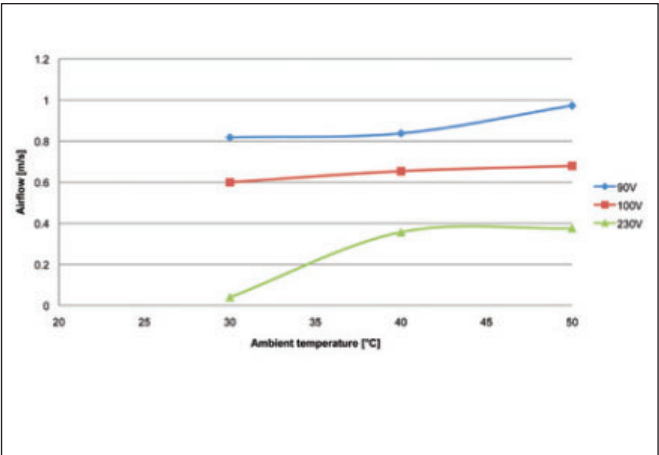



ZMS100 Series Efficiency Curves

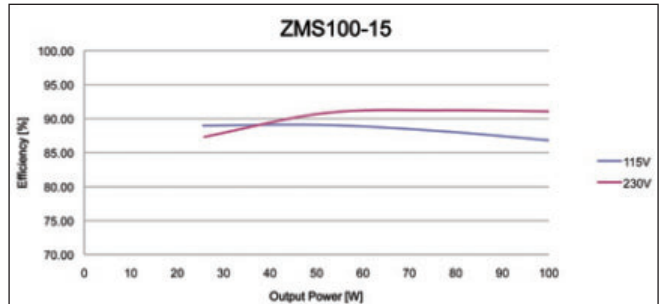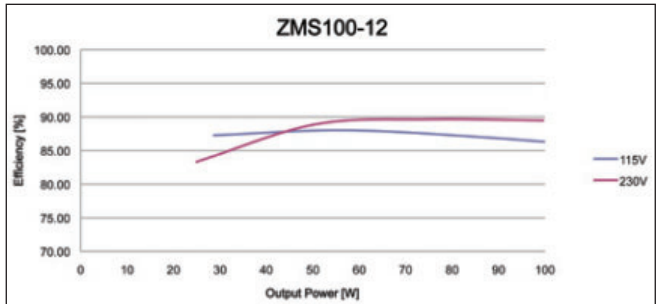



ZMS100 Series Efficiency Curves

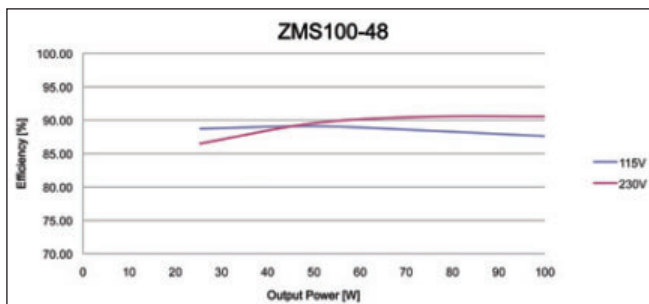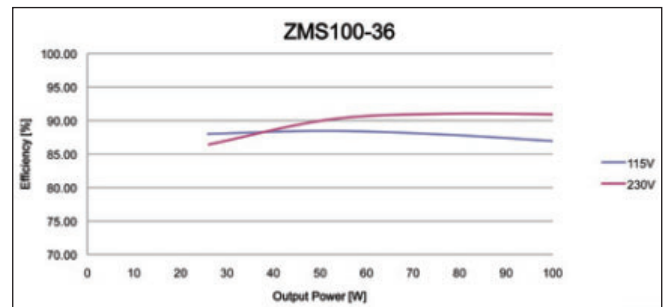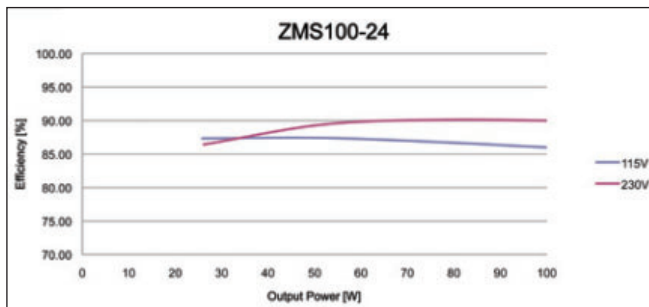

Hold Up Time Characteristics for ZMS100 (12V)

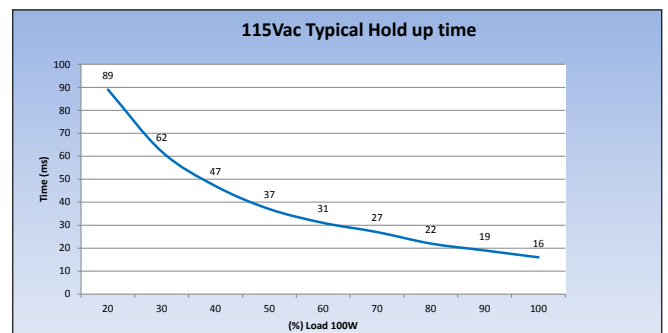
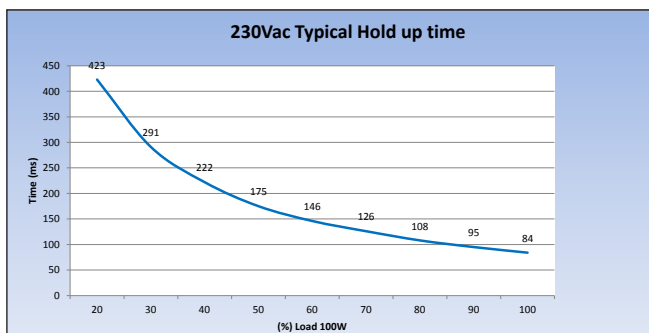


Electrolytic Capacitor: Example Life Curve

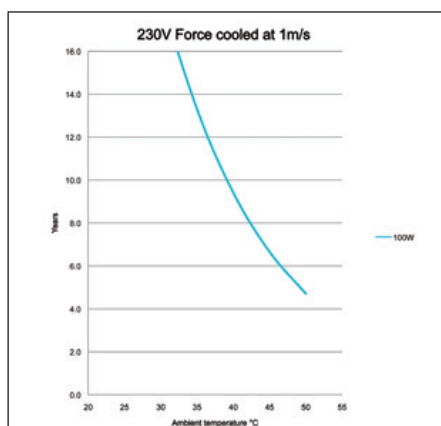
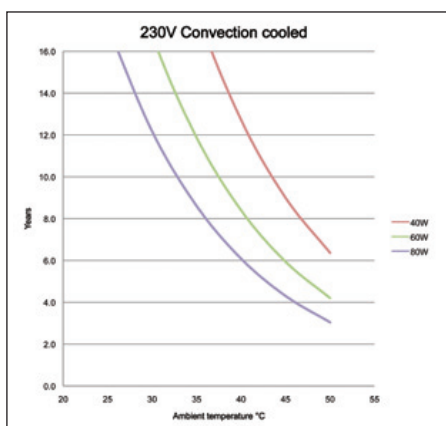


Notes: Based on ZMS100-12 bulk cap life estimates. Consult TDK-Lambda for other operating condition examples.

Outline Drawing ZMS100 24 - 48V Series

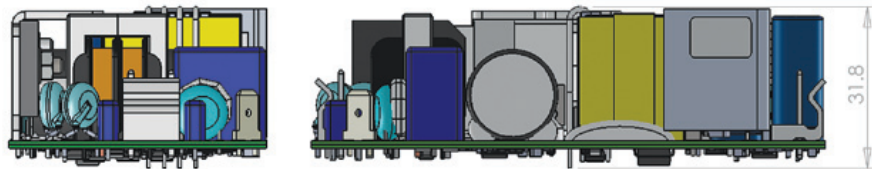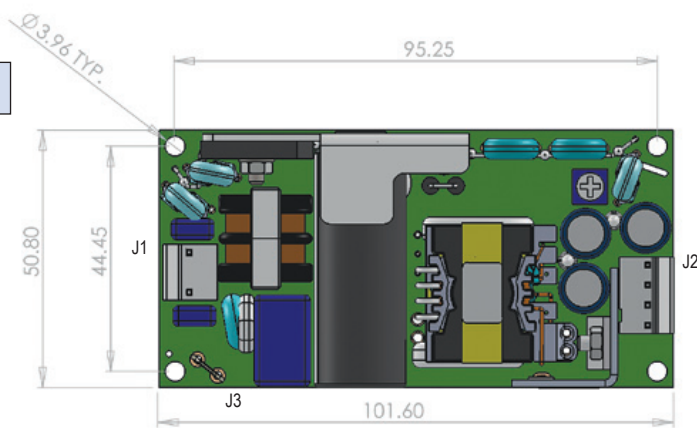

Outline Drawing ZMS100 12 - 15V Series

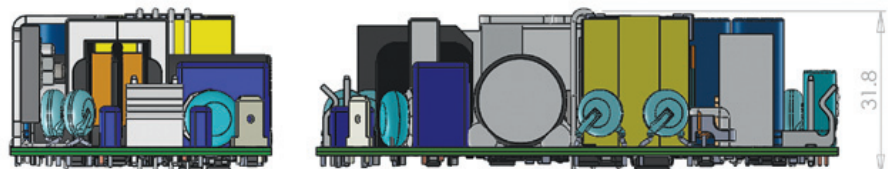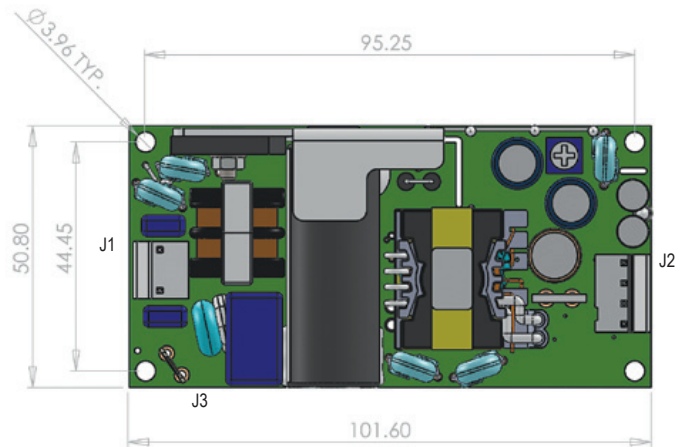

ZMS100 Series Pinout

J1	J2	J3
PIN Connection	PIN Connection	PIN Connection
1 Live	1 +VE	1 Earth
2 Not Connected	2 +VE	
3 Neutral	3 0V	
	4 0V	

ZMS100 Mating Parts

Connector	Housing	Crimp Pin	Manufacturer
J1	09-50-1031	08-70-1030	Molex
J2	09-50-1041	08-70-1030	Molex
J3	22-18AWG - 2-520407-2 (Faston) 16-14AWG - 3-520408-2	-	Tyco

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Брянск (4832)59-03-52
Вологда (8172)26-41-59
Иваново (4932)77-34-06
Калининград (4012)72-03-81
Киров (8332)68-02-04
Курск (4712)77-13-04
Москва (495)268-04-70
Нижний Новгород (831)429-08-12
Орел (4862)44-53-42
Пермь (342)205-81-47
Самара (846)206-03-16
Смоленск (4812)29-41-54
Тверь (4822)63-31-35
Тюмень (3452)66-21-18
Челябинск (351)202-03-61

Астана +7(7172)727-132
Владивосток (423)249-28-31
Воронеж (473)204-51-73
Ижевск (3412)26-03-58
Калуга (4842)92-23-67
Краснодар (861)203-40-90
Липецк (4742)52-20-81
Мурманск (8152)59-64-93
Новокузнецк (3843)20-46-81
Оренбург (3532)37-68-04
Ростов-на-Дону (863)308-18-15
Санкт-Петербург (812)309-46-40
Сочи (862)225-72-31
Томск (3822)98-41-53
Ульяновск (8422)24-23-59
Череповец (8202)49-02-64

Белгород (4722)40-23-64
Волгоград (844)278-03-48
Екатеринбург (343)384-55-89
Казань (843)206-01-48
Кемерово (3842)65-04-62
Красноярск (391)204-63-61
Магнитогорск (3519)55-03-13
Набережные Челны (8552)20-53-41
Новосибирск (383)227-86-73
Пенза (8412)22-31-16
Рязань (4912)46-61-64
Саратов (845)249-38-78
Ставрополь (8652)20-65-13
Тула (4872)74-02-29
Уфа (347)229-48-12
Ярославль (4852)69-52-93

Эл. почта: adm@nt-rt.ru || Сайт: <http://lambda.nt-rt.ru/>