


Технические характеристики на источники питания AC/DC серии RTW

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Брянск (4832)59-03-52
Вологда (8172)26-41-59
Иваново (4932)77-34-06
Калининград (4012)72-03-81
Киров (8332)68-02-04
Курск (4712)77-13-04
Москва (495)268-04-70
Нижний Новгород (831)429-08-12
Орел (4862)44-53-42
Пермь (342)205-81-47
Самара (846)206-03-16
Смоленск (4812)29-41-54
Тверь (4822)63-31-35
Тюмень (3452)66-21-18
Челябинск (351)202-03-61

Астана +7(7172)727-132
Владивосток (423)249-28-31
Воронеж (473)204-51-73
Ижевск (3412)26-03-58
Калуга (4842)92-23-67
Краснодар (861)203-40-90
Липецк (4742)52-20-81
Мурманск (8152)59-64-93
Новокузнецк (3843)20-46-81
Оренбург (3532)37-68-04
Ростов-на-Дону (863)308-18-15
Санкт-Петербург (812)309-46-40
Сочи (862)225-72-31
Томск (3822)98-41-53
Ульяновск (8422)24-23-59
Череповец (8202)49-02-64

Белгород (4722)40-23-64
Волгоград (844)278-03-48
Екатеринбург (343)384-55-89
Казань (843)206-01-48
Кемерово (3842)65-04-62
Красноярск (391)204-63-61
Магнитогорск (3519)55-03-13
Набережные Челны (8552)20-53-41
Новосибирск (383)227-86-73
Пенза (8412)22-31-16
Рязань (4912)46-61-64
Саратов (845)249-38-78
Ставрополь (8652)20-65-13
Тула (4872)74-02-29
Уфа (347)229-48-12
Ярославль (4852)69-52-93

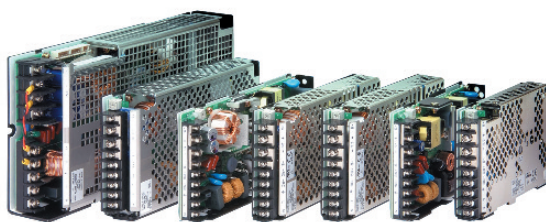

RTW Series

Single Output Industrial Power Supplies

- 5 Year Warranty
- Ultra Thin Package
- SEMI F47 Compliant (high line AC)
- Universal Input (85 - 265VAC)
- High Efficiency

Key Market Segments & Applications

Semiconductor Fabrication
Test & Measurement:
LED Signs

RTW Features and Benefits

Features

- 5 Year Warranty
- Ultra Thin Package
- Wide range AC Input

Benefits

- Lower Cost of Ownership
- Allows use in small spaces
- Supports global use

Specifications

MODELS		50W	100W	150W	300W
ITEMS					
AC Input Voltage	-	85 - 265VAC (47 - 440Hz), 150-340VDC			
Input Current (100/200VAC) (Typ)	A	0.7 / 0.4	1.5 / 0.75	1.9 / 1.0	2.0 / 4.0
Inrush Current (100/200VAC)	A	14 / 28			15 / 30
DC Input Voltage	V	120 - 375VDC			150 - 340VDC
Power Factor	-	Meets EN61000-3-2			
Overcurrent Protection	-	Yes, typically 105 - 125% (100 & 150W hiccup style)			
Overvoltage Protection	V	Yes, typically 120-140%. Cycle input to reset			
Hold Up Time (100/200VAC)	ms	>20			
Leakage Current (max at 240VAC)	mA	0.6	0.45	0.65	0.75
Load Regulation	%	0.4% (0-100% load change)			
Line Regulation	%	0.2% (85-132 or 170-265VAC line change)			
Remote Sense	-	Yes			
Current Share	-	No			Yes
Remote On/Off	-	Yes, see instruction manual on website			
DC Fail Signal	-	No			Yes
Indicator	-	Green LED = ON			
Operating Temperature	-	-10°C to +71°C, -20°C start up. See derating curves on sheet 2			
Storage Temperature	°C	-30°C to +75°C			
Humidity (non condensing)	-	10 - 95%RH			
Cooling	-	Convection			
Withstand Voltage	-	Input to Ground 2kVAC, Input to Output 3kVAC, Output to Ground 500VAC for 1 min.			
Isolation Resistance	-	>100MΩ at 25°C & 70%RH, Output to Ground 500VDC			
Vibration (non operating)	-	5 - 200Hz (10 min sweep), 19.6m/s², 1 hour (Amplitude 10mm)			
Shock (Vertical mounting) (3)	-	196m/s²			588m/s²
Safety Agency Approvals (1)	-	UL60950-1, CSA60950-1 (cUL), EN60950-1, CE Mark			
Line Dip	-	Complies with SEMI F47 (200VAC line only)			
Conducted & Radiated EMI	-	EN55011 / EN55022-B, FCC-B			
Immunity	-	IEC61000-4-2 (Level 4), -3, -4 (Level 3), -5 (Level 4)			
Weight (Typ)	g	290	450	600	1300
Size (WxHxD)	mm	22 x 82 x 124	25 x 82 x 160	30 x 92 x 180	40 x 120 x 250
Warranty	yrs	5			


Notes: (1) Consult Sales Office for use under DC Input conditions (2) 100/200VAC (3) Non operating, 11 ±5ms, 3 directions, 3 times each.

Model Selector							
Model	Voltage (V)	Adjustment Range	Max Current (A)	Max Power (W)	Ripple/Noise (mV)	Efficiency (typ)% ²	Pack Size
RTW03-12R	3.3V	2.6 - 4.0	12.5	41.2	120	75 / 77	50W
RTW03-25R	3.3V	2.6 - 4.0	25	82.5	120	79 / 81	100W
RTW03-35R	3.3V	2.6 - 4.0	35	115.5	120	80 / 83	150W
RTW03-70RH	3.3V	1.8 - 3.6	70	231	120	83 / 86	300W
RTW05-10R	5V	4.0 - 5.8	10	50	120	80 / 82	50W
RTW05-20R	5V	4.0 - 5.8	20	100	120	83 / 85	100W
RTW05-30R	5V	4.0 - 5.8	30	150	120	83 / 86	150W
RTW05-60RH	5V	3.5 - 5.6	60	300	120	84 / 87	300W
RTW12-4R3	12V	9.6 - 13.2	4.3	51.6	150	81 / 83	50W
RTW12-8R4	12V	9.6 - 13.2	8.4	100.8	150	84 / 86	100W
RTW12-12R	12V	9.6 - 13.2	12.5	150	150	84 / 87	150W
RTW12-25RH	12V	7.2 - 14.4	25	300	150	83 / 86	300W
RTW15-3R5	15V	12.0 - 16.5	3.5	52.5	150	82 / 85	50W
RTW15-6R7	15V	12.0 - 16.5	6.7	100.5	150	85 / 87	100W
RTW15-10R	15V	12.0 - 16.5	10	150	150	84 / 87	150W
RTW15-20RH	15V	10.5 - 18.0	20	300	150	83 / 86	300W
RTW24-2R2	24V	19.2 - 26.4	2.2	52.8	200	82 / 85	50W
RTW24-4R2	24V	19.2 - 26.4	4.2	100.8	200	85 / 87	100W
RTW24-6R3	24V	19.2 - 26.4	6.3	151.2	150	86 / 88	150W
RTW24-13RH	24V	16.8 - 26.4	13	312	200	85 / 88	300W
RTW28-1R8	28V	22.4 - 30.8	1.8	50.4	200	82 / 85	50W
RTW28-3R6	28V	22.4 - 30.8	3.6	100.8	200	85 / 87	100W
RTW28-5R4	28V	22.4 - 30.8	5.4	151.2	200	86 / 88	150W
RTW28-11RH	28V	19.6 - 33.6	11	308	200	85 / 88	300W
RTW48-1R1	48V	38.4 - 52.8	1.1	52.8	300	82 / 85	50W
RTW48-2R1	48V	38.4 - 52.8	2.1	100.8	300	85 / 88	100W
RTW48-3R2	48V	38.4 - 52.8	3.2	153.6	200	86 / 89	150W
RTW48-6R5H	48V	33.6 - 55.0	6.5	312	300	86 / 89	300W


Notes: (2) 100/200VAC See website technical downloads for detailed information

Options	
Suffix	Description
L	Vertical Terminal Block (option for 50W & 100W models only)
C	Cover (50W, 100W & 150W models)
H	Cover (300W models)

Derating Curves RTW50-150W Series

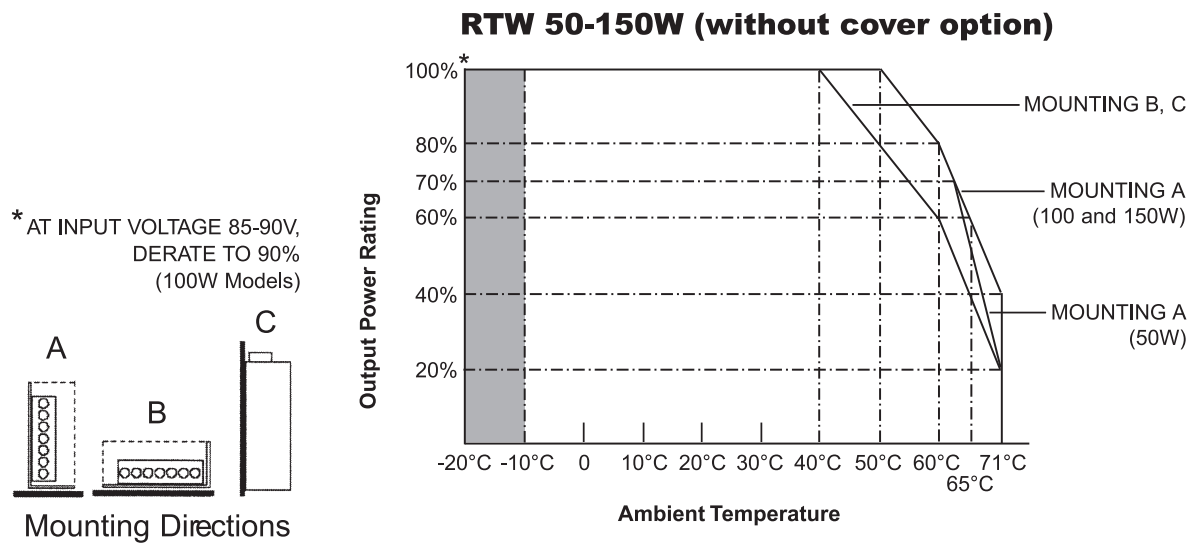

Derating Curve RTW 300W Series

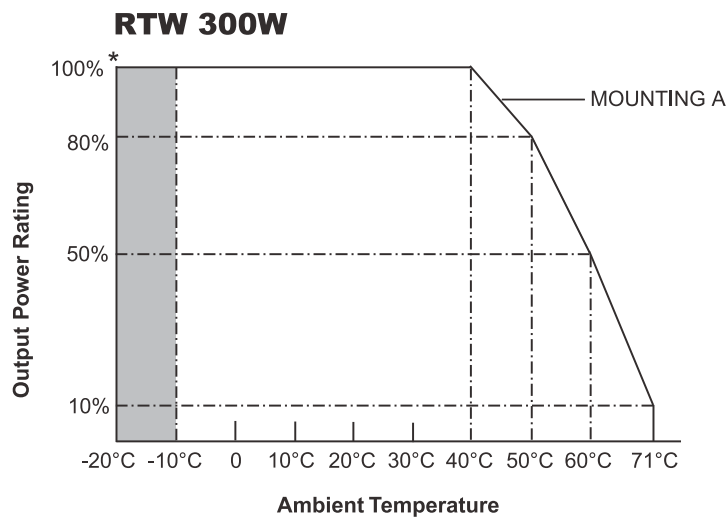

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72	Астана +7(7172)727-132	Белгород (4722)40-23-64
Брянск (4832)59-03-52	Владивосток (423)249-28-31	Волгоград (844)278-03-48
Вологда (8172)26-41-59	Воронеж (473)204-51-73	Екатеринбург (343)384-55-89
Иваново (4932)77-34-06	Ижевск (3412)26-03-58	Казань (843)206-01-48
Калининград (4012)72-03-81	Калуга (4842)92-23-67	Кемерово (3842)65-04-62
Киров (8332)68-02-04	Краснодар (861)203-40-90	Красноярск (391)204-63-61
Курск (4712)77-13-04	Липецк (4742)52-20-81	Магнитогорск (3519)55-03-13
Москва (495)268-04-70	Мурманск (8152)59-64-93	Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12	Новокузнецк (3843)20-46-81	Новосибирск (383)227-86-73
Орел (4862)44-53-42	Оренбург (3532)37-68-04	Пенза (8412)22-31-16
Пермь (342)205-81-47	Ростов-на-Дону (863)308-18-15	Рязань (4912)46-61-64
Самара (846)206-03-16	Санкт-Петербург (812)309-46-40	Саратов (845)249-38-78
Смоленск (4812)29-41-54	Сочи (862)225-72-31	Ставрополь (8652)20-65-13
Тверь (4822)63-31-35	Томск (3822)98-41-53	Тула (4872)74-02-29
Тюмень (3452)66-21-18	Ульяновск (8422)24-23-59	Уфа (347)229-48-12
Челябинск (351)202-03-61	Череповец (8202)49-02-64	Ярославль (4852)69-52-93

Эл. почта: adm@nt-rt.ru || Сайт: <http://lambda.nt-rt.ru/>