

Технические характеристики на преобразователи напряжения AC/DC серии SWS600-1000L

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Брянск (4832)59-03-52
Вологда (8172)26-41-59
Иваново (4932)77-34-06
Калининград (4012)72-03-81
Киров (8332)68-02-04
Курск (4712)77-13-04
Москва (495)268-04-70
Нижний Новгород (831)429-08-12
Орел (4862)44-53-42
Пермь (342)205-81-47
Самара (846)206-03-16
Смоленск (4812)29-41-54
Тверь (4822)63-31-35
Тюмень (3452)66-21-18
Челябинск (351)202-03-61

Астана +7(7172)727-132
Владивосток (423)249-28-31
Воронеж (473)204-51-73
Ижевск (3412)26-03-58
Калуга (4842)92-23-67
Краснодар (861)203-40-90
Липецк (4742)52-20-81
Мурманск (8152)59-64-93
Новокузнецк (3843)20-46-81
Оренбург (3532)37-68-04
Ростов-на-Дону (863)308-18-15
Санкт-Петербург (812)309-46-40
Сочи (862)225-72-31
Томск (3822)98-41-53
Ульяновск (8422)24-23-59
Череповец (8202)49-02-64

Белгород (4722)40-23-64
Волгоград (844)278-03-48
Екатеринбург (343)384-55-89
Казань (843)206-01-48
Кемерово (3842)65-04-62
Красноярск (391)204-63-61
Магнитогорск (3519)55-03-13
Набережные Челны (8552)20-53-41
Новосибирск (383)227-86-73
Пенза (8412)22-31-16
Рязань (4912)46-61-64
Саратов (845)249-38-78
Ставрополь (8652)20-65-13
Тула (4872)74-02-29
Уфа (347)229-48-12
Ярославль (4852)69-52-93



- Quiet Temperature Controlled Fan
- Low Cost
- Low Profile
- Wide Operating Temperature Range
- Active Power Factor Correction
- Medical Approvals (SWS1000L)

SWS600/1000L Series

600W and 1000W Low Profile Single Output Power Supplies

SWS600/1000L Features and Benefits

Features

- Temperature Controlled Fan
- Global safety Approvals
- Wide Temperature Range
- Level B EMI

Benefits

- Low Acoustic Noise
- Supports Global Use
- Suitable for Outdoor Temperature Extremes
- Assists System Compliance

Specifications

ITEMS	MODEL	SWS600L	SWS1000L
Input Voltage range	-	85 - 265VAC (47 - 63Hz) or 120 - 350VDC*	
Inrush Current (115 / 230VAC)	A	20 / 40	
Power Factor	-	Meets EN61000-3-2 Class A	
Input Current (100/200VAC)	A	7.1 / 3.6 (3.3V : 5/2.5)	12/6 (3.3V : 8/4)
Temperature Coefficient	-	<0.02%/°C	
Overcurrent Protection	-	>105%, Constant current style	
Overvoltage Protection	V	125% -145%	
Over temperature Protection	-	Yes, cycle AC or Remote On/Off to reset	
Hold Up Time (Typ)	ms	20ms at 115/230VAC	
Leakage Current (max)	mA	<0.75mA	<0.3mA ⁽¹⁾
Remote Sense	-	Yes	
Parallel Connection	-	Yes	
Remote On/Off (CNT)	-	Yes	
Voltage Programming	-	Yes, 1-6V adjusts output from 20 - 120% of nominal	
DC Good & Fan Fail Signal	-	Yes, open collector output	
Auxiliary Output	-	12V 0.1A	
LED Indicator	-	Green LED = On	
Operating Temperature	-	-40°C start up. -20°C to 74°C, derating linearly to 50% load above 50°C	
Storage Temperature	-	-40°C to +85°C	
Humidity (non condensing)	-	20 - 90% RH operating, 10 - 95%RH non operating	
Cooling	-	Internal fan	
Withstand Voltage(One minute)	-	Input to Ground 2kVAC, Input to Output 3kVAC, Output to Ground 500VAC, Output to CNT 100VAC	Input to Ground 2kVAC, Input to Output 4kVAC**, Output to Ground 500VAC, Output to CNT 100VAC
Isolation Resistance	-	>50MΩ at 25°C & 70%RH, Output to Ground 500VDC	
Vibration (non operating)	-	MIL-STD-810F 514.5 CAT. 4, 10	
Shock (in packaging)	-	MIL-STD-810F 516.5 Procedure 1, V1	
Immunity	-	EN61000-4-2, -3, -4, -5, -6, -8, -11	
Safety Agency Approvals	-	UL/CSA/EN 60950-1, UL/CSA/IEC/EN 60601-1 & ANSI/AAMI ES60601-1,(1000W only), IEC61010-1 (600W only), EN50178, CE Mark	
Conducted & Radiated EMI	-	EN55011 / EN55022-B, FCC Class B	
Weight (Typ)	g	1600	2300
Size (WxHxD)	mm	61 x 120 x 190	61 x 150 x 240
Warranty	yrs	3	

Notes: (1) Worst case: <300μA at 264Vac, 63Hz (Normal condition); <500μA (Single Fault Condition).

*Safety certified for AC input only


**2 x MOPP, IEC60601-1 (3rd edition)

Note: (Numbers in brackets indicate peak current and power available at 170 - 265VAC Input, 10s max, 35% duty cycle)

Model Selector								
Model	Voltage (V)	Adjust Range (via Trim Pot)	Max Curr. (A)	Max Pwr (W)	Load Reg (mV)	Line Reg (mV)	Ripple Noise (mV)	Eff. ⁽²⁾ (typ)%
SWS600L-3	3.3V	2.64 - 3.96V	120	396	30	20	120	70 / 72
SWS1000L-3	3.3V	2.64 - 3.96V	200	660	30	20	120	74 / 76
SWS600L-5	5V	4 - 6V	120	600	30	20	120	75 / 77
SWS1000L-5	5V	4 - 6V	200	1000	30	20	120	79 / 81
SWS600L-12	12V	9.6 - 14.4V	53	636	72	48	150	79 / 82
SWS1000L-12	12V	9.6 - 14.4V	88	1056	72	48	150	82 / 84
SWS600L-15	15V	12 - 19.5V	43	645	90	60	150	79 / 82
SWS1000L-15	15V	12 - 19.5V	70	1050	90	60	150	82 / 84
SWS600L-24	24V	19.2 - 28.8V	27 (31)	648 (744)	144	96	150	81 / 84
SWS1000L-24	24V	19.2 - 28.8V	44 (51)	1056 (1224)	144	96	150	84 / 86
SWS600L-36	36V	28.8 - 43.2V	18	648	216	144	200	82 / 84
SWS1000L-36	36V	28.8 - 43.2V	29	1044	216	144	200	84 / 86
SWS600L-48	48V	38.4 - 56V	13 (15)	624 (720)	288	192	200	82 / 84
SWS1000L-48	48V	38.4 - 56V	22 (25)	1056 (1200)	288	192	200	84 / 86
SWS600L-60	60V	48 - 66V	10	600	360	240	200	82 / 84
SWS1000L-60	60V	48 - 66V	17	1020	360	240	200	84 / 86

Note: ⁽²⁾ 115 / 230Vac


Outline Drawing SWS600L Series

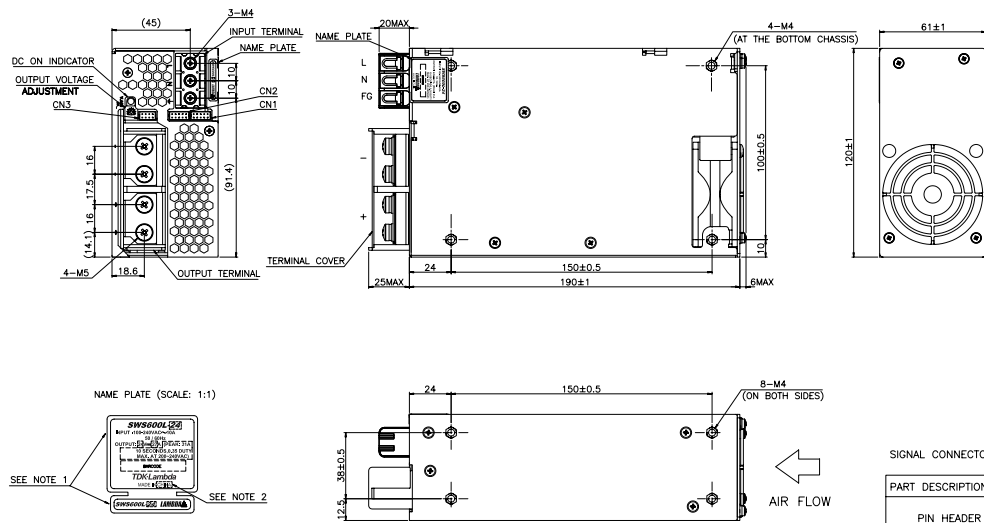

NOTE:

- 1: MODEL NAME, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, NOMINAL OUTPUT CURRENT AND PEAK OUTPUT CURRENT ARE SHOWN ON THE NAME PLATE IN ACCORDANCE WITH THE SPECIFICATIONS
- 2: COUNTRY OF MANUFACTURE IS SHOWN ON THE NAME PLATE IN ACCORDANCE WITH THE SPECIFICATIONS
- 3: M4 TAPPED HOLES (12) FOR CUSTOMER CHASSIS MOUNTING
(SCREW PENETRATION DEPTH 6mm MAX.)
- 4: RECOMMENDED SCREW TORQUE OUTPUT TERMINAL(M5 SCREW) = 2.5N·m
INPUT TERMINAL(M4 SCREW) = 1.27N·m

Outline Drawing SWS1000L Series

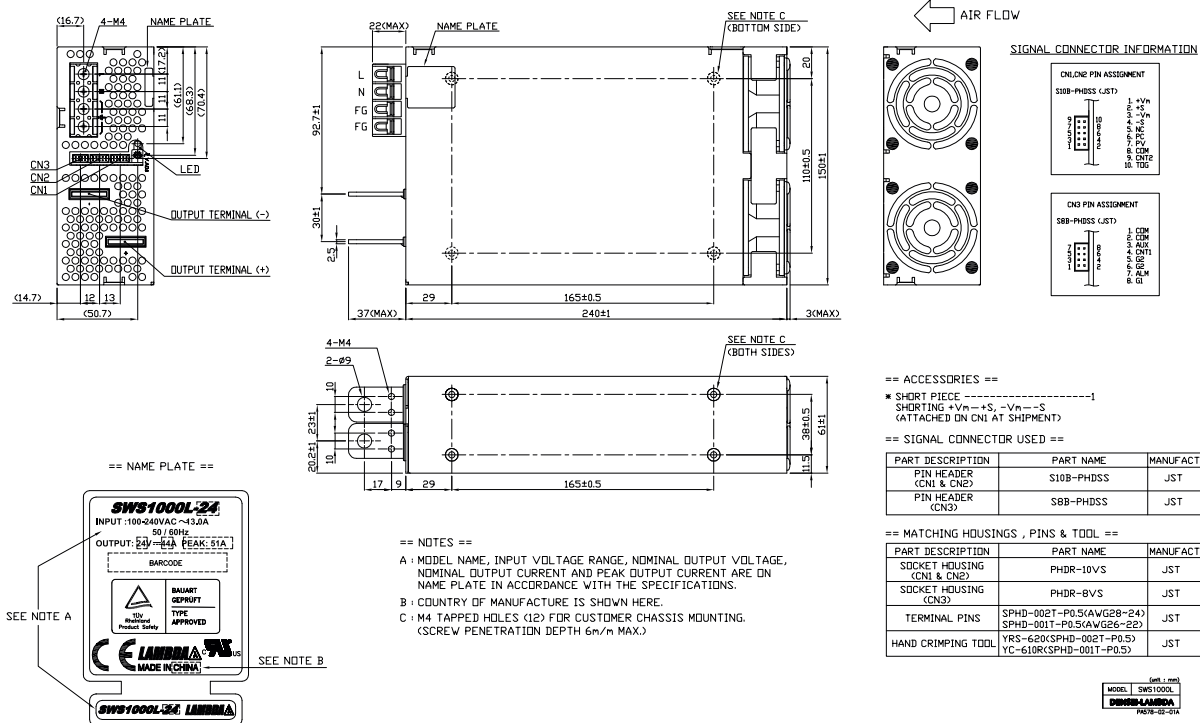

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72	Астана +7(7172)727-132	Белгород (4722)40-23-64
Брянск (4832)59-03-52	Владивосток (423)249-28-31	Волгоград (844)278-03-48
Вологда (8172)26-41-59	Воронеж (473)204-51-73	Екатеринбург (343)384-55-89
Иваново (4932)77-34-06	Ижевск (3412)26-03-58	Казань (843)206-01-48
Калининград (4012)72-03-81	Калуга (4842)92-23-67	Кемерово (3842)65-04-62
Киров (8332)68-02-04	Краснодар (861)203-40-90	Красноярск (391)204-63-61
Курск (4712)77-13-04	Липецк (4742)52-20-81	Магнитогорск (3519)55-03-13
Москва (495)268-04-70	Мурманск (8152)59-64-93	Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12	Новокузнецк (3843)20-46-81	Новосибирск (383)227-86-73
Орел (4862)44-53-42	Оренбург (3532)37-68-04	Пенза (8412)22-31-16
Пермь (342)205-81-47	Ростов-на-Дону (863)308-18-15	Рязань (4912)46-61-64
Самара (846)206-03-16	Санкт-Петербург (812)309-46-40	Саратов (845)249-38-78
Смоленск (4812)29-41-54	Сочи (862)225-72-31	Ставрополь (8652)20-65-13
Тверь (4822)63-31-35	Томск (3822)98-41-53	Тула (4872)74-02-29
Тюмень (3452)66-21-18	Ульяновск (8422)24-23-59	Уфа (347)229-48-12
Челябинск (351)202-03-61	Череповец (8202)49-02-64	Ярославль (4852)69-52-93

Эл. почта: adm@nt-rt.ru || Сайт: <http://lambda.nt-rt.ru/>