


Технические характеристики на источники питания AC/DC серии ZWX

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Брянск (4832)59-03-52
Вологда (8172)26-41-59
Иваново (4932)77-34-06
Калининград (4012)72-03-81
Киров (8332)68-02-04
Курск (4712)77-13-04
Москва (495)268-04-70
Нижний Новгород (831)429-08-12
Орел (4862)44-53-42
Пермь (342)205-81-47
Самара (846)206-03-16
Смоленск (4812)29-41-54
Тверь (4822)63-31-35
Тюмень (3452)66-21-18
Челябинск (351)202-03-61

Астана +7(7172)727-132
Владивосток (423)249-28-31
Воронеж (473)204-51-73
Ижевск (3412)26-03-58
Калуга (4842)92-23-67
Краснодар (861)203-40-90
Липецк (4742)52-20-81
Мурманск (8152)59-64-93
Новокузнецк (3843)20-46-81
Оренбург (3532)37-68-04
Ростов-на-Дону (863)308-18-15
Санкт-Петербург (812)309-46-40
Сочи (862)225-72-31
Томск (3822)98-41-53
Ульяновск (8422)24-23-59
Череповец (8202)49-02-64

Белгород (4722)40-23-64
Волгоград (844)278-03-48
Екатеринбург (343)384-55-89
Казань (843)206-01-48
Кемерово (3842)65-04-62
Красноярск (391)204-63-61
Магнитогорск (3519)55-03-13
Набережные Челны (8552)20-53-41
Новосибирск (383)227-86-73
Пенза (8412)22-31-16
Рязань (4912)46-61-64
Саратов (845)249-38-78
Ставрополь (8652)20-65-13
Тула (4872)74-02-29
Уфа (347)229-48-12
Ярославль (4852)69-52-93

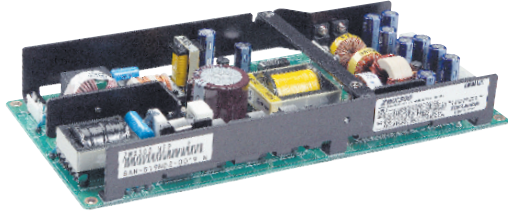

ZWX Series

180W to 300W

Industrial ATX Power Supplies

- 90 - 150W Convection Cooled Ratings
- 1U High
- ATX SFX 12V Compatible
- Power Factor Corrected
- Peak Power Ratings
- No Minimum Loading Required

Key Market Segments & Applications

Industrial & Rack Mount

PC Applications

ZWX Features and Benefits

Features

- Convection Cooled Ratings
- Low Profile
- Industrial Grade
- No minimum loading

Benefits

- No Forced Air or Fan Needed
- Fits into 1U High Enclosures
- Greater Reliability & Field Life
- Easier to Use

Specifications

MODELS			ZWX180	ZWX240	ZWX300
ITEMS					
Input Voltage	V		85-265VAC (47-63Hz)		
Input Current (1)(2)	A		1.9 / 1.0	2.6 / 1.3	3.2 / 1.6
Inrush Current (2)	A		14 / 28 Cold start 25°C ambient		
Power Factor	-		Meets EN61000-3-2		
Leakage Current	mA		< 0.75		
Overcurrent Protection (3)	-		>1.05% of forced air current rating (5s delay and manual reset on V1, 2 & 3)		
Overvoltage Protection (4)	V		+3.3V: 3.76 - 4.3V, +5V: 5.74 - 7V, +12V: 13.4 - 15.6V		
Hold Up Time (Typ) (1)	ms		20ms at 100VAC		
Efficiency (1)(2)	%		81 / 84		
Remote On/Off	-		High: Unit off, Low: Unit On (enabled). Meets SFX12V		
DC Good PWR_OK	-		High: Power supply is good. Meets SFX12V		
Remote Sense	-		+3.3V Only		
Output Voltage Setpoint Accuracy	-		±5% (all outputs)		
Output Voltage Adjustment	-		None		
Line Regulation	mV		3.3V: 20mV, 5V: 48mV, +12V: 48mV, -12V: 20mV, +5Vsb: 20mV		
Load Regulation	mV		3.3V: 100mV, 5V: 300mV, +12V: 300mV, -12V: 100mV, +5Vsb: 100mV		
Ripple & Noise	mV		3.3V: 120mV, 5V: 150mV, +12V: 150mV, -12V: 120mV, +5Vsb: 120mV		
Operating Temperature	°C		-10 to +70, derate linearly to 20% load from 50 to 70		
Storage Temperature	°C		-30 to +85°C		
Humidity (non condensing)	%RH		Operating: 30 - 90, Non operating: 10 - 95		
Cooling	-		Convection or forced air cooled (30CFM, 0.85m3/min)		
Withstand Voltage	-		I/P to Gnd 2kVAC (20mA), I/P to O/P 3kVAC (20mA), O/P to Gnd 500VAC (100mA) for 1 min.		
Isolation Resistance	-		>100Ω at 25°C & 70%RH, Output to Ground 500VDC		
Vibration (non operating)	-		10 - 55Hz (1 minute sweep), 19.6m/s2 constant X, Y, Z 1 hour		
Shock (non operating)	m/s ²		< 392		
Safety Agency Approvals	-		UL60950-1, CSA60950-1, EN60950-1, EN50178 (OV II), CE Mark		
Conducted & Radiated EMI	-		EN55011/EN55022-B, FCC Class B, VCCI-B		
Immunity	-		EN61000-4-2, -3, -4, -5, -6, -8, -11		
Weight (Typ)	g		500	650	800
Size (WxHxD)	mm		94 X 36 X 210	106 X 36 X 225	118 X 36 X 250
Warranty	yrs		3 Years		

Model Selector								
Model		Output Voltage	Max Curr. (Convection)	Max Power (Convection)	Max Curr (Forced Air)	Max Power (Forced Air)	Peak Curr. (4) (Forced Air)	Peak Power (4) (Forced Air)
ZWX180	V1	+3.3V	6A(5)		8.4A(5)		12A(5)	
	V2	+5V	5A(5)		7A(5)		10A(5)	
	V3	+12V	6A	90W	9A	153W	13A	180W
	V4	-12V	0.2A		0.3A		0.3A	
	V5	+5V (sb)	1.4A		2A		2A	
ZWX240	V1	+3.3V	7A		9.8A		14A	
	V2	+5V	6A		8.4A		12A	
	V3	+12V	8A	120W	11.2A	204W	16A	240W
	V4	-12V	0.2A		0.3A		0.3A	
	V5	+5V (sb)	1.4A		2A		2A	
ZWX300	V1	+3.3V	10A		14A		20A	
	V2	+5V	6A		8.4A		12A	
	V3-1	+12V	4A(6)	150W	5.6A	255W	8A(7)	300W
	V3-2	+12V	8A(6)		11.2A		16A(7)	
	V4	-12V	0.2A		0.4A		0.4A	
	V5	+5V (sb)	1.4A		2A		2A	

Options	
Suffix	Description
Blank	Open frame
/L1	L Bracket - input on the left side (rear mounting side facing away)
/L2	L Bracket - input on the right side (rear mounting side facing away)
/A1	L Bracket & Cover - input on the left side (rear mounting side facing away)
/A2	L Bracket & Cover - input on the right side (rear mounting side facing away)

NOTES: Specification Table Page 1


- (1) With output loading of:
ZWX180: V1=6.5A, V2=6.5A, V3=7.7A, V4=0.2A, V5=1A
ZWX240: V1=8.9A, V2=7.7A, V3=10.2A, V4=0.3A, V5=2A
ZWX300: V1=12A, V2=7A, V3-1=5A, V3-2=9.4A, V4=0.2A, V5=1A
- (2) 100/200VAC
- (3) Avoid prolonged operation in overload
- (4) <5s operation at peak load

Cable Harness				
Connector	Harness	ZWX180	ZWX240	ZWX300
CN1	HA-2-IN	Y	Y	Y
CN21	ZWX-HA-04	Y	Y	Y
CN21(S-ATA)	ZWX-HA-02	Y	Y	Y
CN31/CN41	ZWX-HA-01	Y	Y	Y
CN51	ZWX-HA-03	-	-	Y


Output Ratings Table above

- (5) Maximum combined power of V1 & V2: 32W convection, 54W forced air, 63W peak
- (6) V3-1 & V3-2 combined current limited to 10.9A (131W)
- (7) V3-1 & V3-2 combined current limited to 22A (264W)


Outline Drawing ZWX180 Series

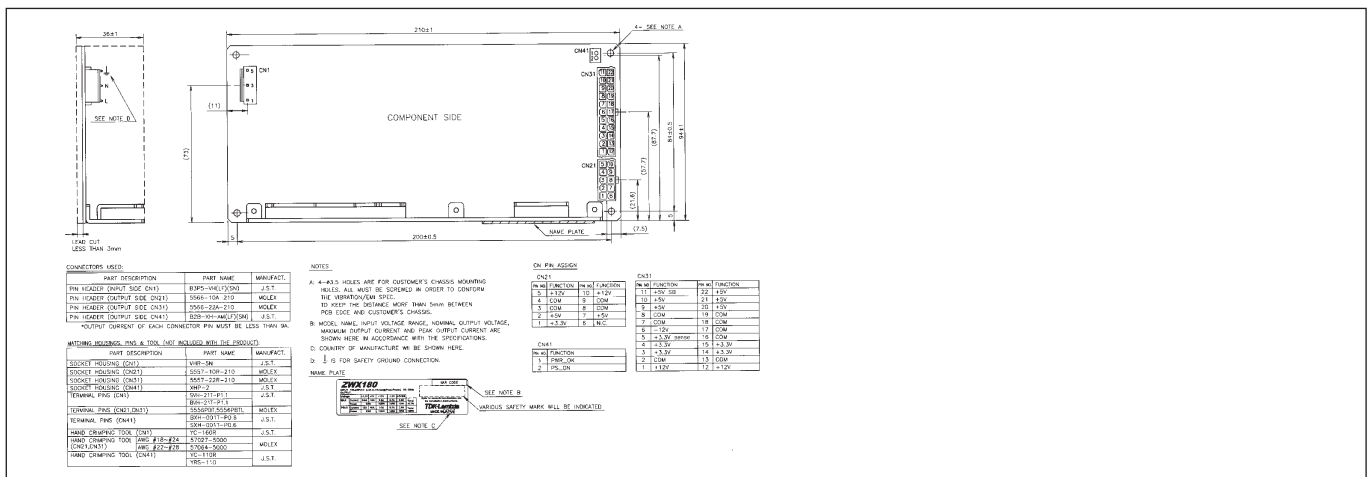

Outline Drawing ZWX240 Series

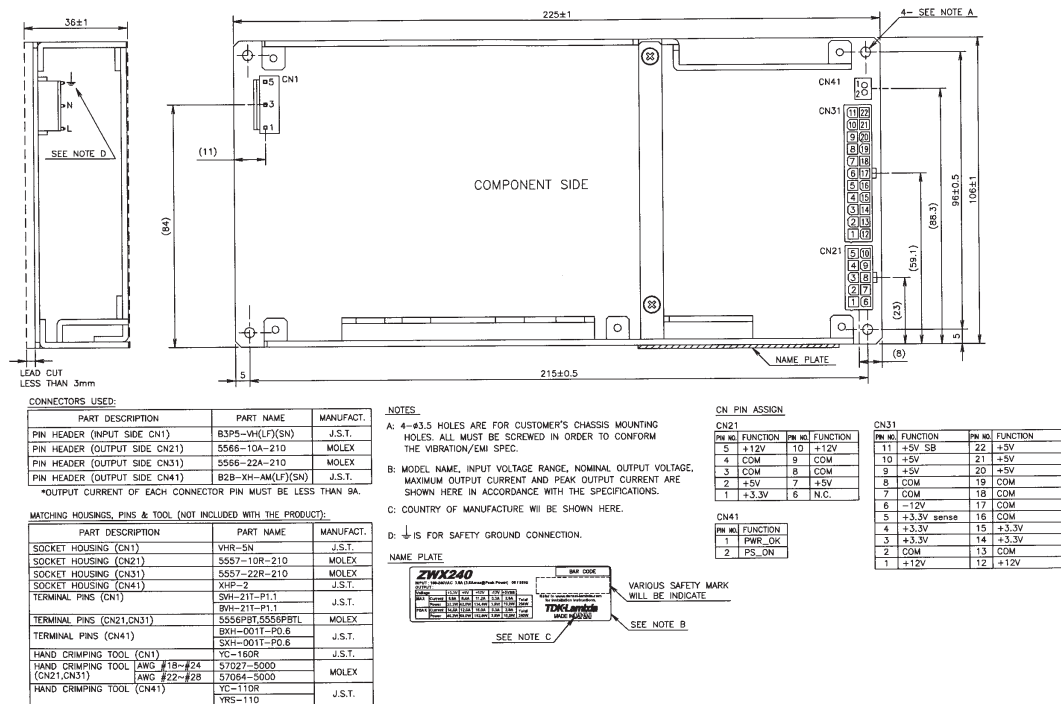

Outline Drawing ZWX300 Series

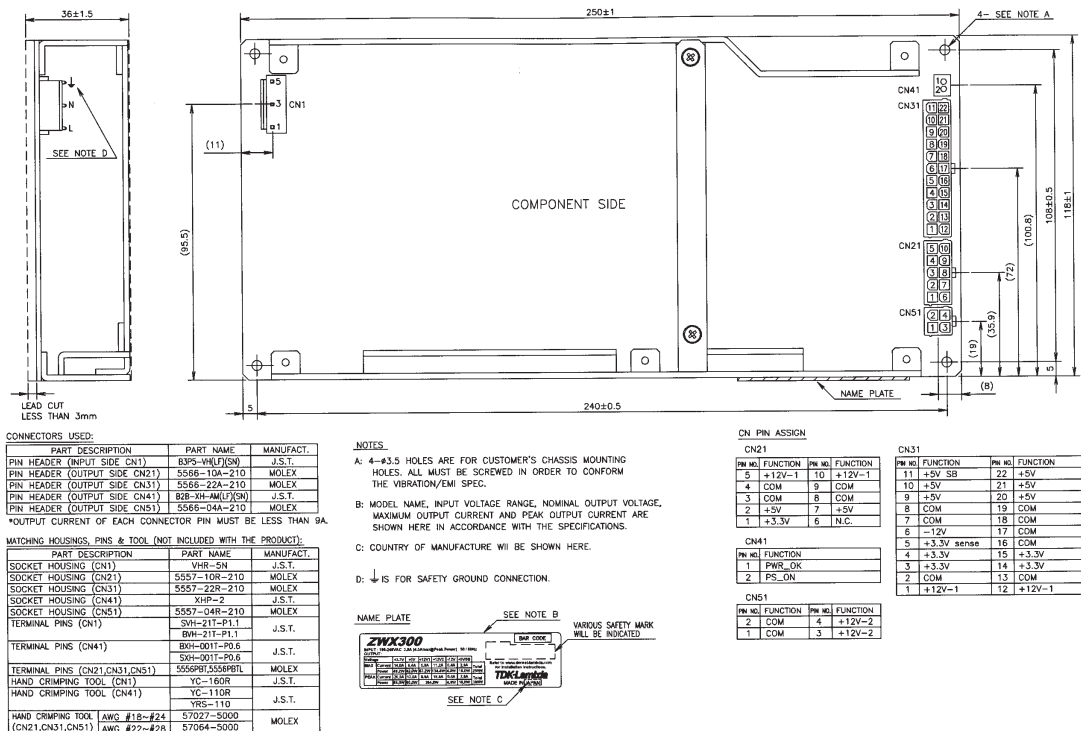

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Брянск (4832)59-03-52
Вологда (8172)26-41-59
Иваново (4932)77-34-06
Калининград (4012)72-03-81
Киров (8332)68-02-04
Курск (4712)77-13-04
Москва (495)268-04-70
Нижний Новгород (831)429-08-12
Орел (4862)44-53-42
Пермь (342)205-81-47
Самара (846)206-03-16
Смоленск (4812)29-41-54
Тверь (4822)63-31-35
Тюмень (3452)66-21-18
Челябинск (351)202-03-61

Астана +7(7172)727-132
Владивосток (423)249-28-31
Воронеж (473)204-51-73
Ижевск (3412)26-03-58
Калуга (4842)92-23-67
Краснодар (861)203-40-90
Липецк (4742)52-20-81
Мурманск (8152)59-64-93
Новокузнецк (3843)20-46-81
Оренбург (3532)37-68-04
Ростов-на-Дону (863)308-18-15
Санкт-Петербург (812)309-46-40
Сочи (862)225-72-31
Томск (3822)98-41-53
Ульяновск (8422)24-23-59
Череповец (8202)49-02-64

Белгород (4722)40-23-64
Волгоград (844)278-03-48
Екатеринбург (343)384-55-89
Казань (843)206-01-48
Кемерово (3842)65-04-62
Красноярск (391)204-63-61
Магнитогорск (3519)55-03-13
Набережные Челны (8552)20-53-41
Новосибирск (383)227-86-73
Пенза (8412)22-31-16
Рязань (4912)46-61-64
Саратов (845)249-38-78
Ставрополь (8652)20-65-13
Тула (4872)74-02-29
Уфа (347)229-48-12
Ярославль (4852)69-52-93

Эл. почта: adm@nt-rt.ru || Сайт: <http://lambda.nt-rt.ru/>