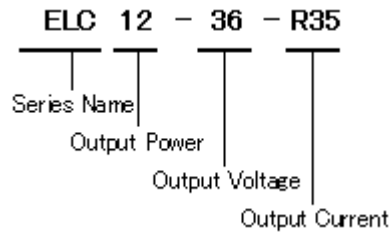


Model name**Features**

- Splash proof (IP66)
- Designed to meet IEC61000-3-2 Class C (Only ELC50, 90/ELV60, 90)
- Constant Current or Constant Voltage Versions

Series Name	ELC			
Model	ELC12-36-R35	ELC12-18-R70	ELC50-48-1R05	ELC90-130-R70
Input Voltage Range	90~265VAC		90~305VAC	
PFHC	-		Designed to meet IEC61000-3-2 Class C	
Maximum Output Power	12.6W	12.6W	50.4W	91W
Output Current	0.35A	0.7A	1.05A	0.7A
Output Voltage	6~36V	3~18V	6~48V	50~130V
Operating Temperature	-10~+60°C		-25~+50°C	
EMI	Designed to meet EN55015, EN55022-B, VCCI-B, CISPR 22-B, FCC-B			
Safety	PSE			
Dimension(WxHxD)	36.5 x 27.2 x 104 mm		45.5 x 40.2 x 228 mm	

Series Name	ELV					
Model	ELV12-12-1R0	ELV12-24-R50	ELV60-12-5R0	ELV60-24-2R5	ELV90-12-7R5	ELV90-24-3R8
Input Voltage Range	90~265VAC		90~305VAC			
PFHC	-		Designed to meet IEC61000-3-2 Class C			
Maximum Output Power	12W	12W	60W	60W	90W	91.2W
Output Voltage	12V	24V	12V	24V	12V	24V
Output Current	0.1~1A	0.05~0.5A	0.2~5A	0.2~2.5A	0.2~7.5A	0.2~3.8A
Operating Temperature	-10~+60°C		-25~+50°C			
EMI	Designed to meet EN55015, EN55022-B, VCCI-B, CISPR 22-B, FCC-B					
Safety	PSE					
Dimension(WxHxD)	36.5 x 27.2 x 104 mm		45.5 x 40.2 x 228 mm			

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Астана +7(7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48

Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81

Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54

Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Эл. почта: adm@nt-rt.ru || Сайт: <http://lambda.nt-rt.ru>