


Технические характеристики на преобразователи напряжения DC/DC серии iHG

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Брянск (4832)59-03-52
Вологда (8172)26-41-59
Иваново (4932)77-34-06
Калининград (4012)72-03-81
Киров (8332)68-02-04
Курск (4712)77-13-04
Москва (495)268-04-70
Нижний Новгород (831)429-08-12
Орел (4862)44-53-42
Пермь (342)205-81-47
Самара (846)206-03-16
Смоленск (4812)29-41-54
Тверь (4822)63-31-35
Тюмень (3452)66-21-18
Челябинск (351)202-03-61

Астана +7(7172)727-132
Владивосток (423)249-28-31
Воронеж (473)204-51-73
Ижевск (3412)26-03-58
Калуга (4842)92-23-67
Краснодар (861)203-40-90
Липецк (4742)52-20-81
Мурманск (8152)59-64-93
Новокузнецк (3843)20-46-81
Оренбург (3532)37-68-04
Ростов-на-Дону (863)308-18-15
Санкт-Петербург (812)309-46-40
Сочи (862)225-72-31
Томск (3822)98-41-53
Ульяновск (8422)24-23-59
Череповец (8202)49-02-64

Белгород (4722)40-23-64
Волгоград (844)278-03-48
Екатеринбург (343)384-55-89
Казань (843)206-01-48
Кемерово (3842)65-04-62
Красноярск (391)204-63-61
Магнитогорск (3519)55-03-13
Набережные Челны (8552)20-53-41
Новосибирск (383)227-86-73
Пенза (8412)22-31-16
Рязань (4912)46-61-64
Саратов (845)249-38-78
Ставрополь (8652)20-65-13
Тула (4872)74-02-29
Уфа (347)229-48-12
Ярославль (4852)69-52-93



- Standard Half Brick Footprint (DOSA)
- 36 - 75VDC Input
- 12V Nominal Output
- Through Hole Mounting
- 1500VDC Basic Isolation

iHG Series

300 - 456W, 48V Input
Half Brick Converter

iHG Features and Benefits

Features

- High operating efficiency (up to 92.5%)
- Constant switching frequency
- Low component count

Benefits

- Reduced system heating
- Easier system filtering
- Higher reliability

Specifications

MODEL		iHG48025A120V-101-R	iHG48038A120V-109-R
ITEMS			
Nominal Output Voltage	VDC	12	12
Input Voltage Range	VDC	36 - 75	38 - 75
Efficiency	%	94	92.5
Ripple & Noise (max)(pk-pk) (1)	mV	250	280
Line Regulation (max)	mV	12	15
Load Regulation (max)	mV	10	15
Overload Protection Threshold (3)	A	30	45
Overvoltage Protection (2)	VDC	14.7	14.7
Overtemperature Protection (3)	-	Yes	
Remote Sense	-	yes	
Remote On-Off	-	Negative Logic	
Temperature (operating)	°C	-40°C to +116°C	
Temperature (storage)	°C	-55°C to +125°C	
Humidity (operating)	-	20 to 95% (non-condensing)	
Humidity (storage)	-	10 to 95% (non-condensing)	
Cooling	-	Convection or Forced Air	
Isolation Voltage	VDC	1500	
Vibration (non operating)	-	5 to 50Hz@0.5g (4.9m/s ²), and 50 to 500Hz@1.5g (14.7m/s ²) per Bellcore TR-EOP-000063-5.4.4	
Shock	-	50 G at 6ms pulse in three axes	
Safety Agency Approvals	-	UL60950 (US and Canada), VDE0805, CB scheme (IEC950), CE Mark (EN60950)	
Weight (max)	g	105	
Size	mm	59.94 x 56.90 x 13.21	
Warranty	yrs	3	


Notes:

- (1) Measured across one 10 μ f, one 0.47 μ f, one 0.1 μ f ceramic capacitors, and one 220 μ f electrolytic capacitor. BW = 20MHz.
 (2) Latching
 (3) Non-latching

Model Selector							
Model	Input Volt. (V)	Output Volt. (V)	Adjust Range (V)	Output Current (A)	Max. Output Power (W)	On/Off Logic	Pin Length (in)
iHG48025A120V-101-R	36 - 75	12	6 - 13.2	25	300	Neg	0.145
IHG48038A120V-109-R	38 - 75	12	6 - 13.2	38	456	Neg	0.180

Preferred
 NB other configurations on request

Hole Pattern (Top View) iHG

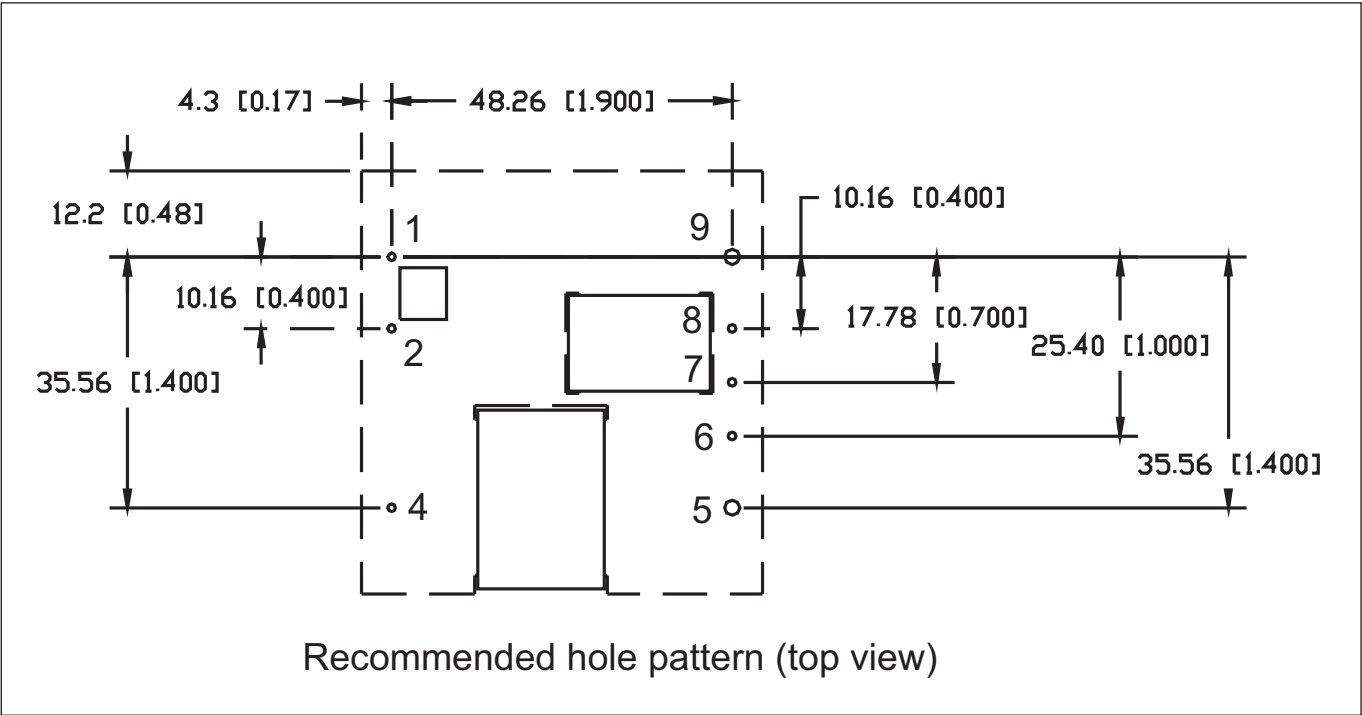

Pinout			
PIN	Function	PIN	Function
1	Vin (+)	6	Sense (-)
2	On / Off	7	Trim
3	N / A	8	Sense (+)
4	Vin (-)	9	Vout (+)
5	Vout (-)		

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Брянск (4832)59-03-52
Вологда (8172)26-41-59
Иваново (4932)77-34-06
Калининград (4012)72-03-81
Киров (8332)68-02-04
Курск (4712)77-13-04
Москва (495)268-04-70
Нижний Новгород (831)429-08-12
Орел (4862)44-53-42
Пермь (342)205-81-47
Самара (846)206-03-16
Смоленск (4812)29-41-54
Тверь (4822)63-31-35
Тюмень (3452)66-21-18
Челябинск (351)202-03-61

Астана +7(7172)727-132
Владивосток (423)249-28-31
Воронеж (473)204-51-73
Ижевск (3412)26-03-58
Калуга (4842)92-23-67
Краснодар (861)203-40-90
Липецк (4742)52-20-81
Мурманск (8152)59-64-93
Новокузнецк (3843)20-46-81
Оренбург (3532)37-68-04
Ростов-на-Дону (863)308-18-15
Санкт-Петербург (812)309-46-40
Сочи (862)225-72-31
Томск (3822)98-41-53
Ульяновск (8422)24-23-59
Череповец (8202)49-02-64

Белгород (4722)40-23-64
Волгоград (844)278-03-48
Екатеринбург (343)384-55-89
Казань (843)206-01-48
Кемерово (3842)65-04-62
Красноярск (391)204-63-61
Магнитогорск (3519)55-03-13
Набережные Челны (8552)20-53-41
Новосибирск (383)227-86-73
Пенза (8412)22-31-16
Рязань (4912)46-61-64
Саратов (845)249-38-78
Ставрополь (8652)20-65-13
Тула (4872)74-02-29
Уфа (347)229-48-12
Ярославль (4852)69-52-93

Эл. почта: adm@nt-rt.ru || Сайт: <http://lambda.nt-rt.ru/>